

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE - (b)(7)(D)



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:

31.01.1996 Bulletin 1996/05

(51) Int Cl.⁶: **H04M 1/00**, **H04Q 7/32**

(21) Application number: 95305183.6

(22) Date of filing: 25.07.1995

(84) Designated Contracting States:

AT BE CH DE ES FR GB IT LI NL SE

(30) Priority: 25.07.1994 US 279413

(71) Applicant: **International Business Machines Corporation**

Armonk, N.Y. 10504 (US)

(72) Inventors:

- Goodwin, Julie Francis

Boca Raton, Florida 33486 (US)

- **Johnson, Debra Ann Gawne**
Fort Lauderdale, Florida 33308 (US)

- Lewis, James Robert
Coconut Street, Florida 33073 (US)

- **Rasmussen, David James**
Boca Raton, Florida 33487 (US)

- Tiller, Byron Kevin
Boca Raton, Florida 33434 (US)

- Yee, Raymond Lee
Coral Springs, Florida 33076 (US)

(74) Representative: **Burt, Roger James, Dr.**
Winchester, Hampshire SO21 2JN (GB)

(54) **Method and apparatus for consistent user interface in a multiple application personal communications device**

(57) An option attach connector has a first indicator bit: combination that alerts the device that a public switched telephone network connection has been made to it. The presence of the first indicator bit combination is a signal to the device that telephone, FAX, and E-mail communications applications are to be conducted over a PSTN link. The presence of the first indicator bit combination invokes the stored computer program to display images of menus, keypads, and visual presentations on the LCD display that are consistent with a basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the PSTN mode of communications. The presence of a second indicator bit combination different from the first indicator bit combination invokes the stored computer program to display corresponding images of menus, keypads, and visual presentations on the LCD display that are consistent with the basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the cellular telephone network mode of communications.

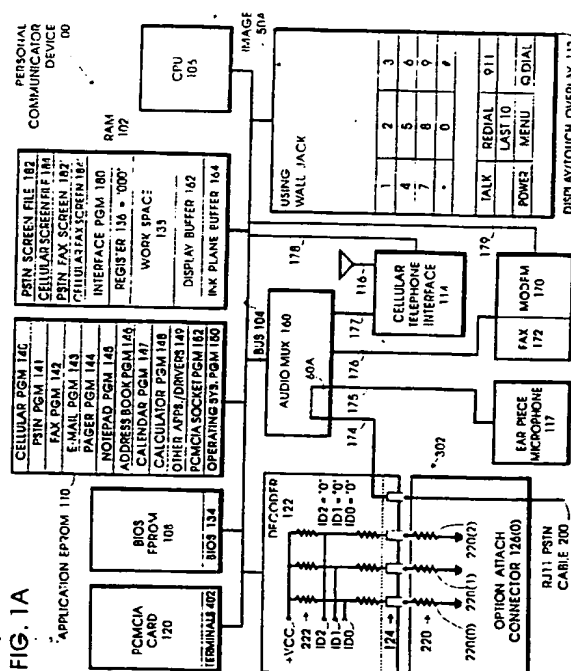


FIG. 1A

Description

FIELD OF THE INVENTION

The present invention relates to data processing systems and data communications systems and more particularly relates to providing a consistent user interface for such systems.

RELATED PATENT APPLICATIONS

This patent application is related to the copending U. S. patent application serial number 279638, entitled "FIELD PROGRAMMING APPARATUS AND METHOD FOR UPDATING PROGRAMS IN A PERSONAL COMMUNICATIONS DEVICE", IBM docket number BC9-94-100, assigned to the IBM Corporation and incorporated herein by reference.

This patent application is also related to the copending U. S. patent application serial number 145917, entitled "PERSONAL COMMUNICATOR HAVING COLLAPSIBLE KEYBOARD FOR EDITING INFORMATION ON SMALL TOUCH SCREEN DISPLAY", IBM docket number BC9-93-077, assigned to the IBM Corporation and incorporated herein by reference.

This patent application is also related to the copending U. S. patent application serial number 146341, entitled "PERSONAL COMMUNICATOR HAVING IMPROVED ZOOM AND PAN FUNCTIONS FOR EDITING INFORMATION ON TOUCH SENSITIVE DISPLAY" COLLAPSIBLE KEYBOARD FOR EDITING INFORMATION ON SMALL TOUCH SCREEN DISPLAY", IBM docket number BC9-93-078, assigned to the IBM Corporation and incorporated herein by reference.

This patent application is also related to the copending U. S. patent application serial number 146342, entitled "PERSONAL COMMUNICATOR HAVING IMPROVED CONTRAST CONTROL FOR A LIQUID CRYSTAL TOUCH SENSITIVE DISPLAY" IBM docket number BC9-93-079, assigned to the IBM Corporation and incorporated herein by reference.

This patent application is also related to the copending U. S. patent application serial number 07/976,127, entitled "NAVIGATION APPLICATION FOR PERSONAL COMMUNICATOR", assigned to the IBM Corporation and incorporated herein by reference.

BACKGROUND OF THE INVENTION

It is widely recognized that digital communications technology and data processing technology are converging. One example of this is the development of portable personal computers that include telephone modems, enabling the transmission of digital information over public switched telephone networks (PSTN). Another example is the development of mobile radio telephones that use microprocessors executing stored programs for sampling and digitizing the voice signal, mul-

tiplexing the transmission of the digitized voice signal with other such voice signals, and digitally controlling the operations of the cellular telephone device.

The most recent evidence of the convergence of digital communications technology with digital personal computer technology, is the SIMON personal communications device described in the above identified patent applications. The SIMON personal communications device has many features within it to enable personal communications. The personal communications device provides a cellular telephone, a facsimile transmission and receiving capability, an electronic mail sending and receiving capability, and an electronic pager, a computer notepad, a computer address book, a computer calendar, and a computer calculator, all within a single compact portable package.

The SIMON personal communications device includes a central processing unit (CPU) that executes stored programmed instructions stored in electrically programmable read only memories (EPROM). The stored program instruction in the EPROM's include basic input output operating system (BIOS) programs, and application programs to perform the functions of cellular telephony, public switched telephone network (PSTN) telephony, facsimile transmission and reception, electronic mail, pager functions, computer notepad functions, computer address book functions, computer calendar functions, and computer calculator functions. These stored programs are selectively accessed for execution by the CPU.

The SIMON personal communications device also includes a liquid crystal display having a touch overlay membrane, to enable the user to input keyboard entries or sketches by tactile pressure with a finger or proximity with a stylus. One example of a touch overlay membrane input device is described in US Patent 4,686,332 by Evon Greanias, et al., entitled "Combined Finger Touch and Stylus Detection System for Use on the Viewing Surface of a Visual Display Device", assigned to the IBM Corporation and incorporated herein by reference.

The storage capacity of the RAM can be augmented by employing supplementary memory in the form of a personal computer memory card (PCMCIA) (Trademark of the Personal Computer Memory Card International Association). The personal computer memory card can include extra RAM to supplement the RAM storage in the personal communications device, by plugging the personal computer memory card into a PCMCIA receptacle slot in the personal communications device.

The LCD screen presents menu images to the user to enable the selection of communications applications such as telephone, facsimile (FAX), or electronic mail (E-mail). For each of these applications, a corresponding keypad and presentation area is displayed. The user has the option of employing either a public switched telephone network link or a cellular telephone network link for any of these communications applications. However, the functions required to be performed in order to send

or receive a cellular telephone network call are different from the functions required for a call over a public switched telephone network.

All cellular telephones use two-way radio communications controlled by the cellular telephone network. The ambient atmospheric and geographic conditions can affect the strength of the transmitted signal. When transmitting a large amount of data during a FAX or an E-mail session, an acceptable signal strength is required to ensure that data is not lost and to keep the transmission error-free. A signal strength indicator is required on cellular telephones to enable the user to monitor the signal strength and change its location to improve it. Further, a cellular telephone must be registered with the home region it usually employs as the base for its communications. If the cellular telephone is transported outside of its home region, it becomes a roamer, and a different mode of operation called roaming, is carried out. A cellular telephone must provide an indication to the user as to its current mode of operation, either home or roaming. Such concerns are absent from calls using a public switched telephone network.

Users prefer consistency in the appearance and use of menus, keys and displays needed to operate a multiple application device such as the SIMON personal communications device. What is needed is a means to provide a consistent user interface for a multiple application personal communications device, that also provides the customized interface features necessary to enable the user to interact with the selected communications medium, either a public switched telephone network or a cellular telephone network.

SUMMARY OF THE INVENTION

The present invention provides an improved user interface for a multiple application personal communications device.

In a first aspect, the present invention provides a system for providing a consistent user interface in a multiple application personal communications device, comprising:

a data storage in the device, for storing program instructions;

a bus means in the device, coupled to said data storage; a data processor in the device, coupled to said data storage over said bus means, for executing said stored program instructions;

a data display screen in the device, coupled to said data processor, for displaying information;

a program means stored in the data storage, having a first portion for managing communications using a public switched telephone network and displaying a first interface image on the display screen;

said program means having a second portion, for managing communications using a mobile radio telephone network and displaying a second interface image on the display screen;

a decoding means coupled to the data processor and to the data storage for selectively causing either said first portion or said second portion of said program means to be executed by the data processor;

an option connector receptacle coupled to said decoding means;

a first option attach connector having a terminal coupled to said public switched telephone network, for selective connection to said option connector receptacle;

a first connector identification means included with said first option attach connector, for identifying said first option attach connector to said decoding means when said first connector is connected to said receptacle, and in response thereto, said decoding means causing the execution of said first portion of said program means and the display of said first image;

said decoding means causing said second portion of said program means to be executed and the display of said second image when said first connector is not connected to said receptacle.

In a second aspect, the invention provides a method for providing a consistent user interface in a multiple application personal communications device, comprising: identifying that a first option attach connector is connected to a receptacle of the device and, in response thereto, causing an execution of a first portion of a program means stored in the device;

displaying a first interface image on a display screen with said first portion of said program means;

identifying an absence of the first option attach connector and in response thereto, causing a second portion of the program means to be executed;

displaying a second interface image on the display screen with said second portion of said program means.

The first and second interface images are preferably interface images for E-mail or interface images for facsimile operations.

The invention thus preferably provides a consistent user interface for a multiple application personal communications device, that adapts to the unique requirements of the selected communications link. The invention preferably provides an adaptive user interface for a multiple application personal communications device for communication over both public switched telephone networks and cellular telephone networks.

The invention is used in a personal communications device that includes a memory that stores the operating system programs and the applications programs for execution by a central processing unit (CPU) in the device.

In this embodiment of the invention the programs selectively manage the operations of a cellular telephone, a facsimile receiver, a touch overlay input and display, and several desktop functions such as a calendar, notepad, and electronic mail.

The device according to this embodiment of the invention is capable of performing many types of communications functions that require a variety of communications links. In addition to the radio link provided for cel-

lular telephony, the device is able to connect to a conventional RJ11 telephone jack for public switched telephone service, to an RS232 serial data connector, to diagnostic cables, to external keyboards, and to hands-free microphones and speakers. To consolidate these connection requirements, an option attach connector is provided for the device. The option attach connector includes three programmable indicator bits that indicate to the device, the role the connector is playing when it is connected to the device.

In accordance with a preferred embodiment of the invention, the option attach connector has a first indicator bit combination that alerts the device that a public switched telephone network connection has been made to it. The presence of the first indicator bit combination is a signal to the device that telephone, FAX, and E-mail communications applications are to be conducted over a PSTN link. The presence of the first indicator bit combination invokes the stored computer program to display images of menus, keypads, and visual presentations on the LCD display that are consistent with a basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the PSTN mode of communications.

Further in accordance with a preferred embodiment of the invention, the presence of a second indicator bit combination different from the first indicator bit combination invokes the stored computer program to display corresponding images of menus, keypads, and visual presentations on the LCD display that are consistent with the basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the cellular telephone network mode of communications.

The presence of the predetermined indicator bit combinations also invokes the stored computer program to provide appropriate connections between the PSTN link or the cellular telephone network and the telephone, FAX, and modem hardware in the device. In this manner, consistent user interface is provided for a multiple application personal communications device, that adapts to the unique requirements of the selected communications link.

An embodiment of the invention will now be described in more detail, by way of example, with reference to the accompanying drawings in which:

FIG. 1A is an overall functional block diagram of a personal communications device, connected to a PSTN option attach connector for voice communications over a PSTN, in accordance with the invention.

FIG. 1B is an overall functional block diagram of a personal communications device, in a cellular telephone network mode, for voice communications over a cellular telephone network, in accordance with the invention.

FIG. 1C is an overall functional block diagram of a personal communications device, connected to a PSTN option attach connector for FAX communications over a

PSTN, in accordance with the invention.

FIG. 1D is an overall functional block diagram of a personal communications device, in a cellular telephone network mode, for FAX communications over a cellular telephone network, in accordance with the invention.

FIG. 1E is an overall functional block diagram of a personal communications device, connected to an external microphone and speaker cable option attach connector for voice communications over a cellular telephone network, in accordance with the invention.

FIGs. 2A to 2H are a schematic diagrams of several embodiments of the option attach connector.

FIG. 3 is an illustration of the appearance of the menu image 50M displayed on the display/touch overlay 112.

FIGs. 4A to 4D are a flow diagram of a method to provide a consistent user interface in a multiple feature personal communications device, according to an embodiment of the invention.

FIG. 5A is an illustration of the appearance of the image 50A displayed on the display/touch overlay 112, for voice communications over a PSTN.

FIG. 5B is an illustration of the appearance of the image 50B displayed on the display/touch overlay 112, for voice communications over a cellular telephone network.

FIG. 5C is an illustration of the appearance of the image 50C displayed on the display/touch overlay 112, for FAX communications over a PSTN.

FIG. 5D is an illustration of the appearance of the image 50D displayed on the display/touch overlay 112, for FAX communications over a cellular telephone network.

FIG. 5E is an illustration of the appearance of the image 50E displayed on the display/touch overlay 112, for E-MAIL communications over a PSTN.

FIG. 5F is an illustration of the appearance of the image 50F displayed on the display/touch overlay 112, for E-MAIL communications over a cellular telephone network.

FIG. 6 illustrates the layout of the master image 50X produced by the interface program 180.

FIG. 6A illustrates the layout of the PSTN customizing image 50Y produced by the PSTN screen file 182, that when combined with the master image 50X of FIG. 6 by the interface program 180, produces the image 50A of Fig. 1A and Fig. 5A, as it is displayed on the display/touch overlay 112, for voice communications over a PSTN.

FIG. 6B illustrates the layout of the cellular customizing image 50Z produced by the cellular screen file 184, that when combined with the master image 50X of FIG. 6 by the interface program 180, produces the image 50B of Fig. 1B and Fig. 5B, as it is displayed on the display/touch overlay 112, for voice communications over a cellular telephone network.

DISCUSSION OF THE PREFERRED EMBODIMENT

The personal communication system diagram of FIG. 1A shows the personal communications device 100. The device 100 includes the RAM 102 which is connected by means of the bus 104 to the CPU 106, which executes the stored program instructions in the RAM 102. RAM 102 contains the ink plane buffer 164 used by the touch overlay membrane to store pels of registered contact points by the user's finger or stylus. RAM 102 contains the display buffer for the LCD display 112. Screen images, such as image 50A in Fig. 1A and Fig. 5A, are represented by a bit map stored in the display buffer 162, that displays the bit map as the image 50A, for example on the display 112. The work space 138 in RAM 102 is used by the operating system program 150 and BIOS 134, as well as by application programs running in the device 100.

Register 136 stores the option value that is decoded by the decoder 122 from the resistor array 220 in the option attach connector 126(0). The interface program 180, stored in RAM 102, reads the option value stored in register 136 and in response, sends control signals to the audio MUX to configure the connections 60A, for example, between the option attach connector 126(0) and the ear piece and microphone 117. This is described in the flow diagram of FIGs. 4A to 4D.

The interface program 180 also controls the display of images such as 50A on the display 112, in response to reading the option value stored in the register 136. This is described in the flow diagram of FIGs. 4A to 4D. FIG. 6 illustrates the layout of the master image 50X produced by the interface program 180. When the interface program generates the PSTN telephone function image 50A, for example, it accesses the PSTN screen file 182 in RAM 102 which contains the layout of the PSTN customizing image 50Y shown in Fig. 6A. The interface program 180 combines the PSTN customizing image 50Y with the master image 50X of FIG. 6, to produce the composite image 50A of Fig. 1A and Fig. 5A, as it is displayed on the display/touch overlay 112, for voice communications over a PSTN.

The RAM 102 also stores the cellular screen file 184, that contains the layout of the cellular customizing image 50Z, that when combined with the master image 50X of FIG. 6 by the interface program 180, produces the image 50B of Fig. 1B and Fig. 5B, as it is displayed on the display/touch overlay 112, for voice communications over the cellular telephone network in Fig. 1B. The audio MUX in Fig. 1B selectively configures the connection 60B connecting the ear piece and microphone 117 to the cellular telephone interface 114.

The RAM 102 also stores the PSTN FAX screen file 182' that is used by the interface program 180 to produce the image 50C in FIG. 5C, which is an illustration of the appearance of the image 50C displayed on the display/touch overlay 112, for FAX communications over a PSTN in Fig. 1C. The audio MUX in Fig. 1C selectively

configures the connection 60C connecting the FAX 172/modem 170 to the PSTN cable 200. FIG. 5E is an illustration of the appearance of the image 50E displayed on the display/touch overlay 112, for E-MAIL communications over a PSTN. Its generation by the interface program 180 and the connections by the audio MUX 160 are the same as that for Fig. 1C.

The option attach connector 126(1) in Fig. 1E, connects the external microphone and speaker cable 201 over line 169 to the audio MUX 160. The resistor array 220 in the connector 126(1) provides a binary value of "001" as the option value stored in the register 136. In response to this option value, the audio MUX in Fig. 1E selectively configures the connection 60E connecting the external microphone and speaker cable 201 to the cellular telephone interface 114. The image 50B is displayed on the display 112, the same as is displayed in Fig. 1B for cellular telephone voice communications.

The RAM 102 also stores the cellular FAX screen file 184' that is used by the interface program 180 to produce the image 50D in FIG. 5D, which is an illustration of the appearance of the image 50D displayed on the display/touch overlay 112, for FAX communications over a cellular telephone network in Fig. 1D. The audio MUX in Fig. 1D selectively configures the connection 60D connecting the FAX 172/modem 170 to the cellular telephone interface 114. FIG. 5F is an illustration of the appearance of the image 50F displayed on the display/touch overlay 112, for E-MAIL communications over a cellular telephone network. Its generation by the interface program 180 and the connections by the audio MUX 160 are the same as that for Fig. 1D.

Also connected to the bus 104 in Fig. 1A, is the BIOS EPROM 108 which stores the basic input output operating system (BIOS) program 134 in 128 kbyte electrically programmable read only memory. Also connected to the bus 104 is the application EPROM 110 which stores application programs. Application programs stored in the application EPROM 110 can include the cellular telephone program 140, the public switched telephone network (PSTN) program 141, the facsimile program 142, the electronic mail (E-MAIL) program 143, the pager program 144, the notepad program 145, the address book program 146, the calendar program 147, the calculator program 148, and other applications and I/O driver programs 149. Also included in the application EPROM 110 is the operating system program 150. Also included in the application EPROM 110 is the PCMCIA card and socket services program 152. The programs stored in the BIOS 108 and the application EPROM 110, can be accessed for execution by the CPU 106.

The audio multiplexer (MUX) 160 in Fig. 1A, is connected to the bus 104, and accepts control signals from the CPU 106 to selectively interconnect lines 174, 175, 176, and 177. Line 174 is connected through the connector receptacle 124 to the RJ11 PSTN cable 200 in Fig. 1A. Line 175 is connected to the ear piece and microphone 117, that are an integral part of the personal

communications device 100. Line 176 is connected to the modem 170 and FAX 172. Data and control signals are directly exchanged between the modem 170/FAX 172 and the CPU 106 over line 179. Line 177 is connected to the cellular telephone interface 114, shown with its radio antenna 116. Data and control signals are directly exchanged between the cellular telephone interface 114 and the CPU 106 over line 178. FIG. 1A shows the personal communications device 100, connected to a PSTN option attach connector 126(0) for voice communications over a PSTN cable 200.

In accordance with the invention, the option attach connector 126(0) has a first indicator bit combination "000" that alerts the device 100 that a public switched telephone network connection 200 has been made to it. The presence of the first indicator bit combination "000" is a signal to the device 100 that telephone, FAX, and E-mail communications applications are to be conducted over the PSTN cable 200. The presence of the first indicator bit combination "000" invokes interface stored computer program 180 to provide appropriate connections in the audio MUX 160, between the PSTN link 200 and the telephone, FAX, and modem hardware in the device. This is described in the flow diagram of FIGs. 4A to 4D. Fig. 1A shows the audio MUX controlled by the CPU 106 to connect line 174 to line 175 by means of connection 60A, connecting the ear piece and microphone 117 to the PSTN cable 200.

Further in accordance with the invention the presence of the first indicator bit combination "000" in Fig. 1A also invokes the stored interface computer program 180 to display images 50A of menus, keypads, and visual presentations on the LCD display 112 that are consistent with a basic display layout for master image 50X of Fig. 6 for both cellular telephone network and PSTN modes, but that include customized presentation features of the PSTN customizing image 50Y of Fig. 6A, that are unique to the PSTN mode of communications. FIG. 6 illustrates the layout of the master image 50X produced by the interface program 180. FIG. 6A illustrates the layout of the PSTN customizing image 50Y produced by the PSTN screen file 182, that when combined with the master image 50X of FIG. 6 by the interface program 180, produces the image 50A of Fig. 1A and Fig. 5A, as it is displayed on the display/touch overlay 112, for voice communications over the PSTN cable 200.

FIG. 1B is an overall functional block diagram of the personal communications device 100, in a cellular telephone network mode, for voice communications over a cellular telephone network, in accordance with the invention. There is no option attach connector in Fig. 1B, and the state of the decoder 122 is the default state with a binary value of "111" for the option value stored in the register 136. In response to this option value, the interface program 180 executes in the CPU 106. The CPU 106 sends control signals to the audio MUX 160 to make the connection 60B between the ear piece and microphone 117 on line 175 and the cellular telephone inter-

face 114 on line 177. This is described in the flow diagram of FIGs. 4A to 4D.

Also connected to the bus 104 is RCMCIA receptacle slot 118 which is adapted to receive the personal computer memory card 120. The personal computer memory card is a PCMCIA standard card as specified in the publication "PC Card Standard", release 2.0, published by Personal Computer Memory Card International Association, September 1991. The PCMCIA card and socket services program 152 manages the interface between the CPU 106 and the personal computer memory card 120. The PCMCIA card and socket services program 152 is described in greater detail in the publication "Socket Services Interface Specification", release 1.0, published by the Personal Computer International Association, September 1991. The personal computer memory card 120, can include extra RAM storage to perform functions such as backup and restore, and to save facsimile images received by the system 100. The personal computer memory card 120 can also include a read only memory (ROM) which has stored in it other pre-stored information such as a metropolitan phone directory. The personal computer memory card 120 can be configured as a reprogramming card for the personal communications device 100. The reprogramming card can contain pre-stored new programs that are to be loaded into the EPROM's 108 and/or 110.

Also connected to the bus 104 is the liquid crystal display (LCD) and touch overlay 112, and the cellular telephone interface 114 with its antenna 116.

The device 100 is capable of performing many types of communications functions over a variety of communications links. In addition to the radio link provided by the cellular telephone interface 114 and its antenna 116, the device 100 must be able to connect to a conventional RJ11 telephone jack for public switched telephone service. The device 100 must also be able to connect to a RS232 serial data connector for data communications applications. The device 100 must also be able to connect to diagnostic cables for diagnosing the operation of the device 100. The device 100 must also be able to connect to an external keyboard when desired. The device must also be able to connect to hands-free microphone and speaker to enable the user to speak on the telephone without having to handle the ear piece and microphone 117 units in the device 100. The ear piece and microphone 117 are an integral part of the personal communications device 100.

To consolidate the connection requirements for the device 100, the option attach connector 126 and its 33 pin receptacle 124 are coupled to the bus 104 through the decoder 122. The option attach connector 126, shown in greater detail in Figures 2A to 2H and in Figure 3, includes three programmable indicator bits that indicate to the device 100, the role that the option attach connector 126 is playing when it is connected through the receptacle 124 to the decoder 122 and the bus 104.

In accordance with the invention, the option attach

connector 126(0) has one indicator bit combination shown in Fig. 1A that alerts the device 100 that the PSTN connector cable 200 is connected to the device 100.

FIGs. 2A to 2H show the eight different option attach connector configurations when three ID bits ID0, ID1, and ID2 are used to configure the connector 126. The binary value of each ID bit ID0, ID1, or ID2 is established by the presence or absence of resistors 220(0), 220(1), or 220(2), respectively, each of which serves as a pull down resistor when connected to the circuit 222 of the decoder 122. For example, if there are no resistors 220 present for the three ID values ID0, ID1 and ID2, this corresponds to a default condition of Fig. 2H where no cable is attached to the connector 126(7). This is shown by the dotted out-line for 126(7) shown in FIG. 2H which corresponds to the binary value "111" for ID0, ID1, and ID2. This is applied in FIGs. 1B and 1D.

When the option attach connection 126 is configured in Fig. 2G to be the reprogramming option connection 126(6), then a single resistor 220(2) corresponds to the ID2 bit. This produces a binary value of ID0, ID1, and ID2 of "110", which signals to the decoder 122 that the reprogramming option connector 126(6) is connected to the receptacle 124 of the decoder 122. Reference can be made to the above identified Allard, et al. patent application for additional description of this feature.

If the single resistor 220(1) is in the ID1 bit position, as shown in Fig. 2F, then the option attach connector is configured as 126(5) which indicates that a diagnostic cable 205 is attached to the connector.

If two resistors 220(1) and 220(2) are connected in the option attach connector 126 at the ID1 and ID2 positions, as shown in Fig. 2E, this corresponds to ID0, ID1, and ID2 equalling a binary "100", which indicates that a personality transfer cable 204 is attached to the connector 126(4).

In FIG. 2D, if a single resistor 220(0) is placed at the ID0 position, then ID0, ID1, and ID2 equalling a binary "011" is created, which corresponds to the connector 126(3), indicating that an external keyboard cable 203 is attached to the connector 126(3).

If two resistors 220(0) and 220(2) are placed at the ID0 and ID2 positions, as shown in Fig. 2C, then this corresponds to the connector 126(2), which means that an RS232 interface cable 202 is attached to the connector 126(2).

In FIG. 2B, if two resistors 220(0) and 220(1) are placed at the ID0 and ID1 positions, this corresponds to the connector 126(1) which has ID0, ID1, and ID2 equalling a binary value of "001", which means that an external microphone and an external speaker are attached by cable 201 to the connector 126(1). This is applied in Fig. 1E.

Finally, if all three resistors 220(0), 220(1), and 220(2) are placed at the ID0, ID1 and ID2 positions, as shown in Fig. 2A, this corresponds to the connector 126(0), which indicates that a RJ11 cable is attached at 200, for public switched telephone network operations. The cable 200 is attached to the connector 126(0). This is

applied in FIGs. 1A and 1C.

FIG. 3 is an illustration of the appearance of the menu image 50M displayed on the display/touch overlay 112. The menu image 50M presents the user with communication application options such as voice communications, FAX communications, or E-MAIL communications. The user selects one of the communications applications by touching the touch overlay membrane overlying the displayed application option. The selected application identity is then stored in the work space 138 of the RAM 102, to be used by the interface program 180, as described in the flow diagram of FIGs. 4A to 4D.

FIGs. 4A to 4D are a flow diagram of the method to provide a consistent user interface in a multiple feature personal communications device.

FIG. 4A shows method 400 to provide a consistent user interface in a multiple feature personal communications device. The steps are as follows:

Step 402: display menu image 50M on display screen 112 (FIG. 3).

Step 404: Load default value "111" into the options register 136 (option attach connector not present 126(7) of FIG. 2H).

Step 406: Select none or one of seven option attach connectors 126(0) to 126(7) of FIGs. 2A to 2H, and connect it to connector receptacle 124 (FIG. 1A).

Step 408: Decode the selected option attach connector 126 with decoder 122 (FIG. 1A).

Step 410: load the option value into the options register 136 of RAM 102 (FIG. 1A).

Step 420: Select telephone function from menu on display/touch overlay screen 112 (FIG. 3).

Step 422: Begin interface program 180 to access options register 136 (FIG. 1A), configure audio MUX, 160 and display screen image on display 112.

Step 424: If option value in options register = "000" (FIG. 1A) (Corresponding to PSTN cable connector 126(0)),

Then configure the audio MUX 160 for path 60A to connect ear piece/microphone 117 from line 175 to line 174 and thru option attach connector 126(0) to the RJ11 PSTN cable 200.

Step 426: access PSTN screen image file 182 and display PSTN phone screen image 50A on display 112 (FIG. 5A).

FIG. 4B continues the flow diagram of method 400. The steps are as follows:

Step 428: If option value in options register = "111" (FIG. 1B) (Corresponding to no connector default state 126(7)), Then configure the audio MUX 160 for path 60B to connect ear piece/microphone 117 from line 175 to line 177 to cellular telephone 114.

Step 430: Access cellular screen image file 184 and display cellular phone screen image 50B on display 112 (FIG. 5B). Step 432: If option value in options register = "001" (FIG. 1E) (Corresponding to external microphone and speaker connector 126(1)), Then configure The audio MUX 160 for path 60E to connect external

microphone and speaker cable 210 thru connector 126 (1) and line 169 to line 177 to cellular telephone interface 114.

Step 434: access cellular screen image file 184 and display cellular phone screen image 50B on display 112 (FIG. 5B).

FIG. 4C continues the flow diagram of method 400. The steps are as follows:

Step 440: Select FAX receive function from menu on display/touch overlay screen 112 (FIG. 3).

Step 442: Begin interface program 180 to access options register 136 (FIG. 1C), configure audio MUX. 160 and display screen image On display 112

Step 444: If option value in options register = "000" (FIG. 1C) (Corresponding to PSTN cable connector 126(0)). Then configure The audio MUX 160 for path 60C to connect FAX 172/modem 170 from line 176 to line 174 and thru option attach connector 126(0) to the RJ11 PSTN cable 200.

Step 446: Access PSTN screen image file 182' and display PSTN FAX screen image 50C on display 112 (FIG. 5c).

Step 448: If option value in options register = "111" (FIG. 1D) (Corresponding to no connector default state 126(7)).

Then configure the audio MUX 160 for path 60D to connect FAX 172/modem 170 from line 176 to line 177 to cellular telephone 114.

Step 450: Access cellular FAX screen image file 184' and display cellular FAX screen image 50D on display 112 (FIG. 5D).

FIG. 4D continues with the flow diagram of method 400. The steps are as follows:

Step 460: Select E-MAIL receive function from menu on display/touch overlay screen 112 (FIG. 3).

Step 462: Begin interface program 180 to access options register 136 (FIG. 1C), configure audio MUX. 160 and display screen image On display 112.

Step 464: If option value in options register = "000" (FIG. 1C) (Corresponding to PSTN cable connector 126(0)).

Then configure the audio MUX 160 for path 60C to connect modem 170 from line 176 to line 174 and thru option attach connector 126(0) to the RJ11 PSTN cable 200.

Step 466: Access PSTN screen image file and display PSTN E-MAIL screen image 50E on display 112 (FIG. 5E).

Step 468: If option value in options register = "111" (FIG. 1D) (Corresponding to no connector default state 126(7)).

Then configure the audio MUX 160 for path 60D to connect modem 170 from line 176 to line 177 to cellular telephone interface 114.

Step 470: Access cellular E-MAIL screen image file & display cellular E-MAIL screen image 50F on display 112 (FIG. 5F).

The method then returns to the main program. The method 400 is carried out primarily through the execution

of program instructions stored in the RAM 102 and executed by the CPU 106.

Although a specific embodiment of the invention has been disclosed, it will be understood by those having skill in the art, that changes can be made to the specific embodiment without departing from the spirit and the scope of the invention.

10 Claims

1. A system for providing a consistent user interface in a multiple application personal communications device, comprising:
 - a data storage in the device, for storing program instructions;
 - a bus means in the device, coupled to said data storage;
 - a data processor in the device, coupled to said data storage over said bus means, for executing said stored program instructions;
 - a data display screen in the device, coupled to said data processor, for displaying information;
 - a program means stored in the data storage, having a first portion for managing communications using a public switched telephone network and displaying a first interface image on the display screen;
 - said program means having a second portion, for managing communications using a mobile radio telephone network and displaying a second interface image on the display screen;
 - a decoding means coupled to the data processor and to the data storage, for selectively causing either said first portion or said second portion of said program means to be executed by the data processor;
 - an option connector receptacle coupled to said decoding means;
 - a first option attach connector having a terminal coupled to said public switched telephone network, for selective connection to said option connector receptacle;
 - a first connector identification means included with said first option attach connector, for identifying said first option attach connector to said decoding means when said first connector is connected to said receptacle, and in response thereto, said decoding means causing the execution of said first portion of said program means and the display of said first image;
 - said decoding means causing said second portion of said program means to be executed and the display of said second image when said first connector is not connected to said receptacle.
2. A system according to claim 1, wherein
 - said first portion of said program means is adapted to display a FAX application image for communication with a public switched telephone network as said first interface image on the display

screen, in response to said first connector identification means included with said first option attach connector, identifying said first option attach connector to said decoding means when said first connector is connected to said receptacle.

3. A system according to claim 1, wherein said first portion of said program means is adapted to display an E-MAIL application image for communication with a public switched telephone network as said first interface image on the display screen, in response to said first connector identification means included with said first option attach connector, identifying said first option attach connector to said decoding means when said first connector is connected to said receptacle.
4. A method for providing a consistent user interface in a multiple application personal communications device, comprising:
 - identifying that a first option attach connector is connected to a receptacle of the device and, in response thereto, causing an execution of a first portion of a program means stored in the device;
 - displaying a first interface image on a display screen with said first portion of said program means;
 - identifying an absence of the first option attach connector and in response thereto, causing a second portion of the program means to be executed;
 - displaying a second interface image on the display screen with said second portion of said program means
5. A system for providing a consistent user interface in a multiple application personal communications device that includes a data storage and a data processor, comprising:
 - a data display screen in the device, coupled to said data processor, for displaying information;
 - an input means, coupled to said data processor, for receiving communications application selection data;
 - a program means stored in the data storage, having a first portion for managing communications using a public switched telephone network and displaying a first interface image on the display screen;
 - said program means having a second portion, for managing communications using a mobile radio telephone network and displaying a second interface image on the display screen;
 - a decoding means coupled to the data processor and to the data storage, for selectively causing either said first portion or said second portion of said program means to be executed by the data processor;
 - a first option attach connector having a terminal coupled to said public switched telephone network, for selective coupling to said decoding means;
 - a first connector identification means included with

said first option attach connector, for identifying said first option attach connector to said decoding means when said first connector is coupled to said decoding means, and in response thereto, said decoding means causing the execution of said first portion of said program means;

said data processor being adapted to send first control signals to said display means to display said first image in response to said identification of said first option attach connector and in response to said communications application selection data;

said decoding means being adapted to cause said second portion of said program means to be executed when said first connector is not coupled to said decoding means;

said data processor sending second control signals to said display means to display said second image in response to said first option attach connector not being coupled to said decoding means and in response to said communications application selection data.

6. A system according to claim 5, wherein said communications application selection data is a voice communications selection.
7. A system according to claim 5, wherein said communications application selection data is a FAX communications selection.
8. A system according to claim 5, wherein said communications application selection data is an E-MAIL communications selection.
9. A method for providing a consistent user interface in a multiple application personal communications device that includes a data storage and a data processor, comprising:
 - identifying a first option attach connector coupled to the device indicating PSTN communications and in response thereto, causing the execution of a first portion of a program means;
 - sending first control signals to a display means to display a first image characterizing PSTN communications in response to said identification of the first option attach connector and in response to communications application selection data;
 - causing a second portion of said program means to be executed when said first connector is not coupled to the device indicating cellular telephone communications;
 - sending second control signals to said display means to display a second image characterizing cellular telephone communications in response to said first option attach connector not being coupled to the device means and in response to said communications application selection data.

10. A method according to claim 9, wherein said communications application selection data is a voice communications selection.
11. A method according to claim 9, wherein said communications application selection data is a FAX communications selection. 5
12. A method according to claim 9, wherein said communications application selection data is an E-MAIL communications selection. 10
13. A method according to any one of claims 9 to 12, which further comprises:
forming said first image from a master image and a 15
PSTN communications characterizing image; and
forming said second image from a master image and
a cellular telephone communications characterizing
image.

20

25

30

35

40

45

50

55

FIG. 1A


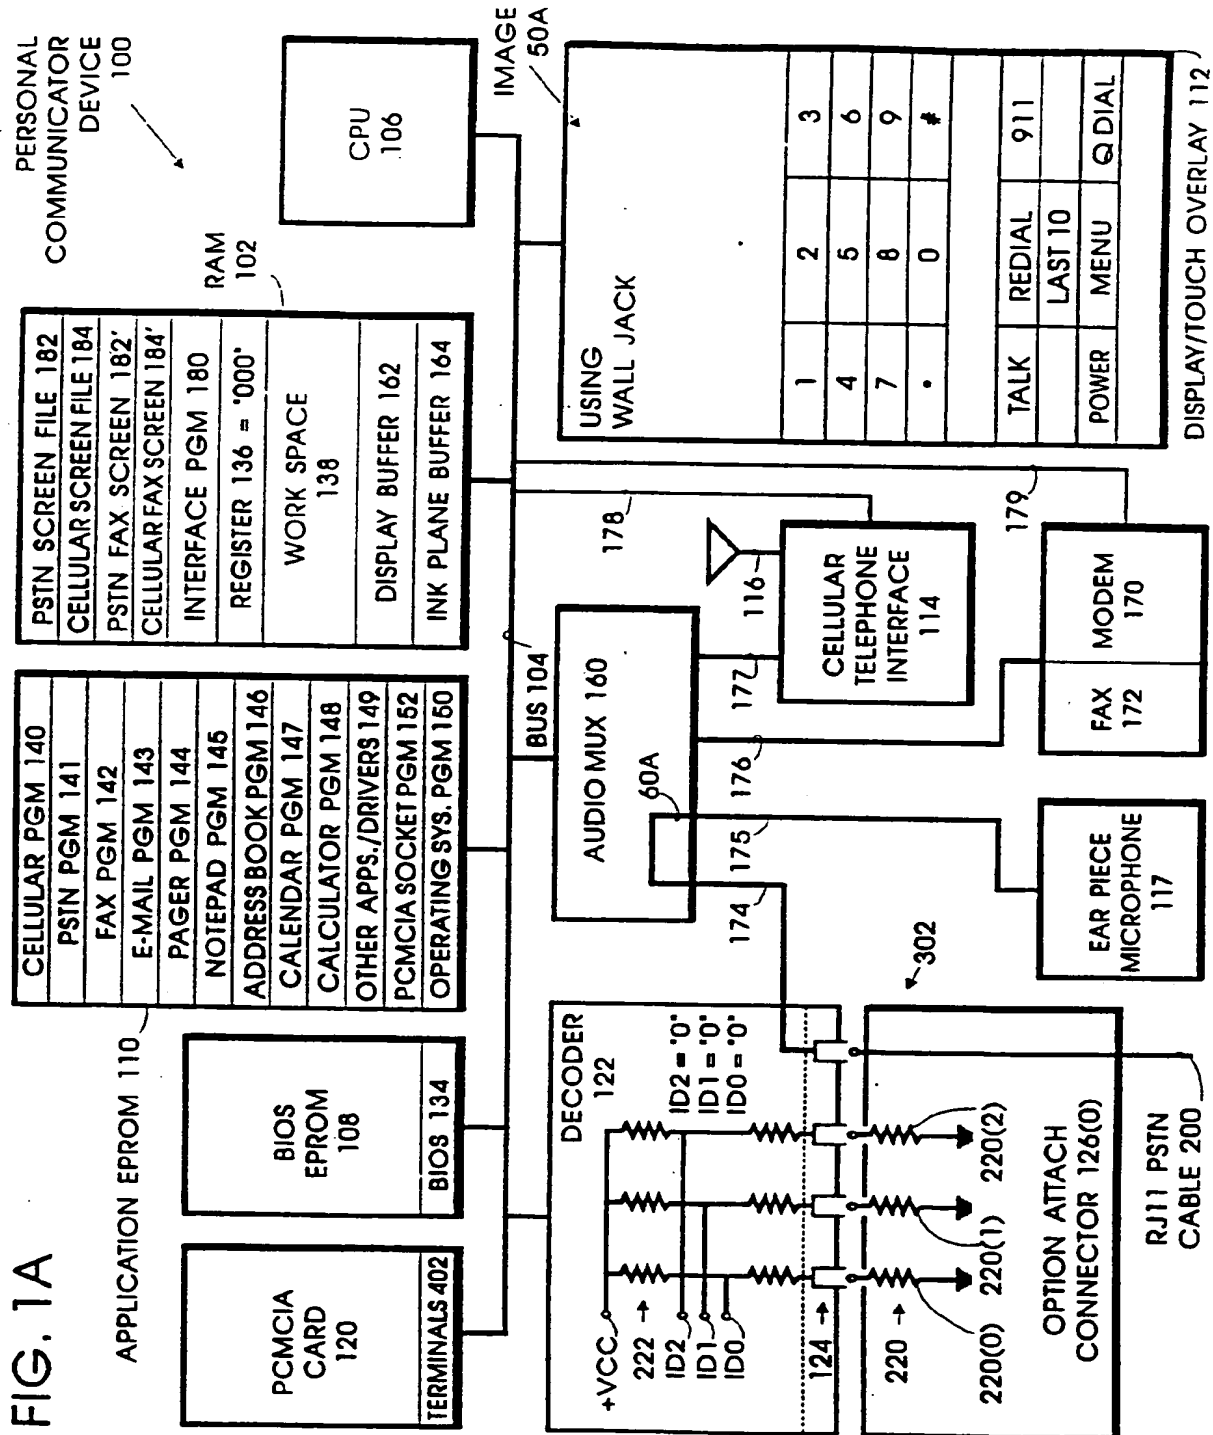


FIG. 1B

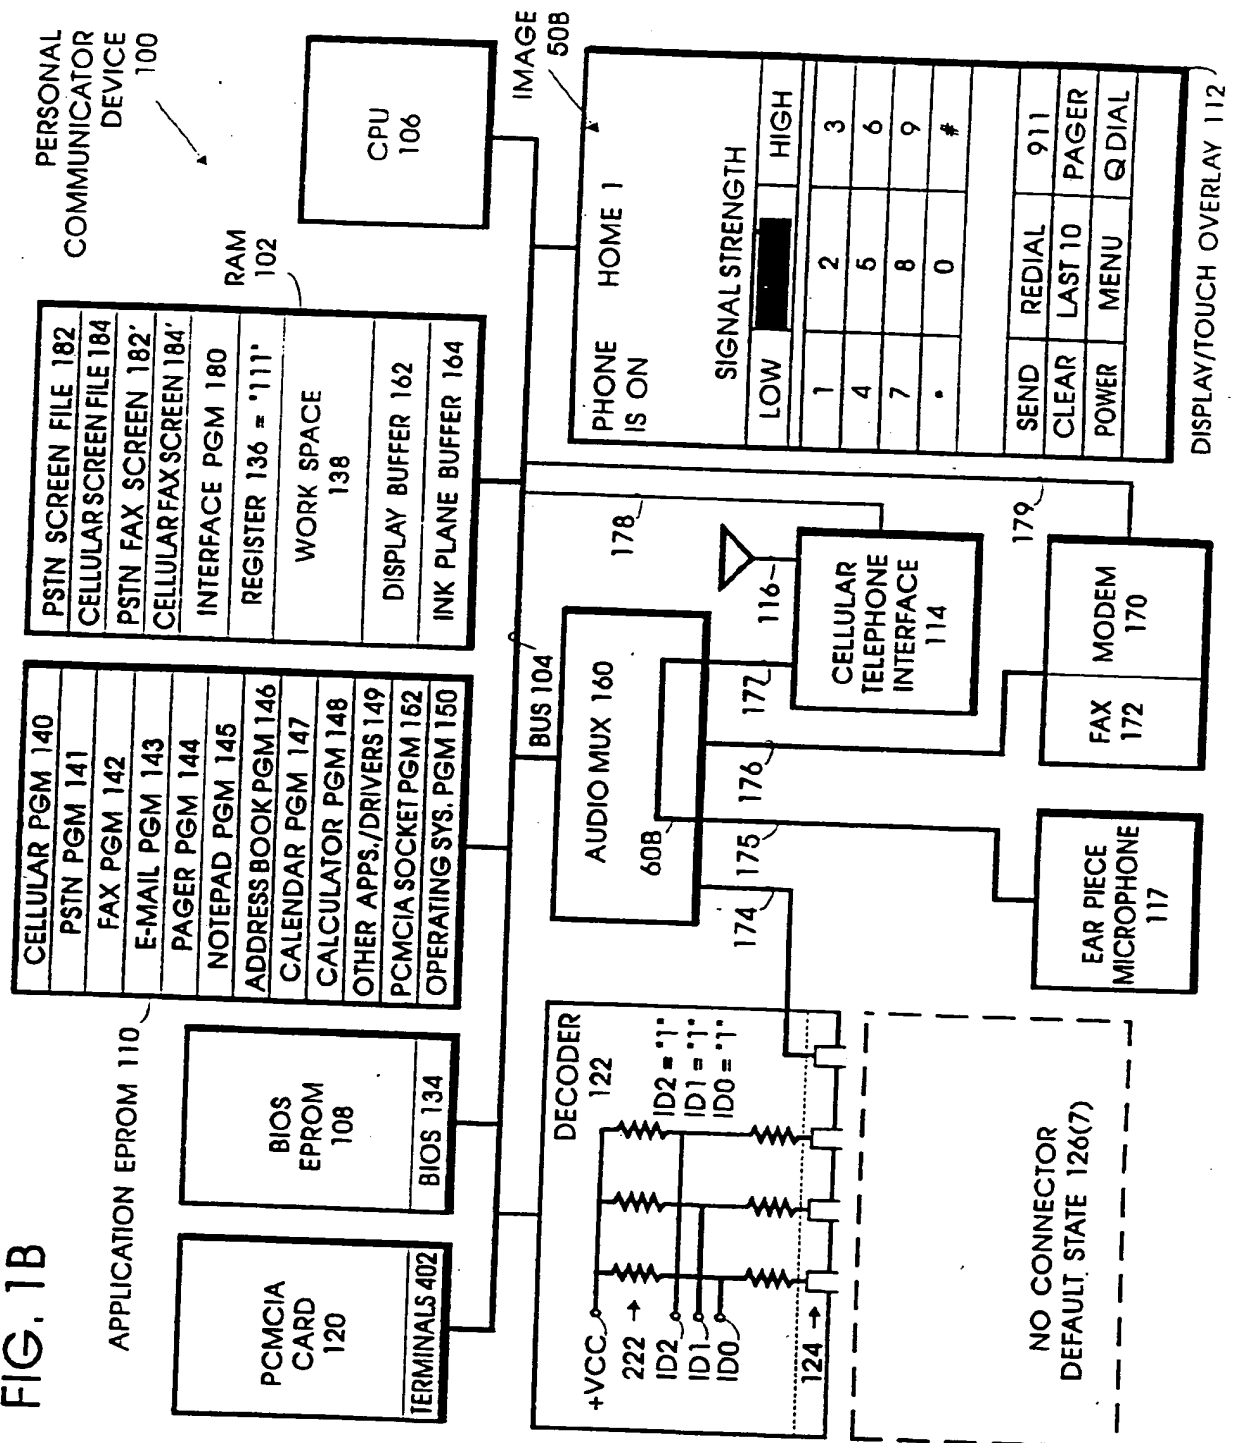

[illegible]

FIG. 1D

The diagram illustrates the internal architecture of a personal communicator device 100. At the top, the device is labeled "PERSONAL COMMUNICATOR DEVICE 100". The main system bus is labeled "BUS 104".

Storage and Firmware:

- APPLICATION EPROM 110:** Contains several program modules:
 - CELLULAR PGM 140
 - PSN PGM 141
 - FAX PGM 142
 - E-MAIL PGM 143
 - PAGER PGM 144
 - NOTEPAD PGM 145
 - ADDRESS BOOK PGM 146
 - CALENDAR PGM 147
 - CALCULATOR PGM 148
 - OTHER APPS./DRIVERS 149
 - PCMCIA SOCKET PGM 152
 - OPERATING SYS. PGM 150
- BIOS EPROM 108:** Contains BIOS 134.
- PCMCIA CARD 120:** Contains TERMINALS 402.

Processing and Control:

- CPU 106:** The central processing unit.
- RAM 102:** Random Access Memory.
- REGISTER 136 = '111':** A specific register value.
- WORK SPACE 138:** Working memory area.
- DISPLAY BUFFER 162:** Buffer for the display output.
- INK PLANE BUFFER 164:** Buffer for the ink plane output.

Input/Output and Interface:

- PCMCIA SOCKET PGM 152:** Interface for the PCMCIA card.
- OPERATING SYS. PGM 150:** Operating system program.
- OTHER APPS./DRIVERS 149:** Other application programs and drivers.
- CALENDAR PGM 147:** Calendar program.
- CALCULATOR PGM 148:** Calculator program.
- ADDRESS BOOK PGM 146:** Address book program.
- NOTEPAD PGM 145:** Notepad program.
- PAGER PGM 144:** Pager program.
- E-MAIL PGM 143:** E-mail program.
- FAX PGM 142:** Fax program.
- PSN PGM 141:** Personal Security Network program.
- CELLULAR PGM 140:** Cellular program.

- CELLULAR TELEPHONE INTERFACE 114:** Connects to the cellular network.
- MODEM 170:** Modem for data communication.
- FAX 172:** Fax module.
- EAR PIECE MICROPHONE 117:** For voice communication.
- RECEIVE FAX:** Module for receiving faxes.
- CHECK SIGNAL STRENGTH:** Module with a bar graph and labels "LOW" and "HIGH".
- OK ?** A button or indicator.
- DISPLAY/TOUCH OVERLAY 112:** The main display area.
- IMAGE 50D:** Image data input/output.

Decoder and Control Logic:

- DECODER 122:** A decoder circuit with inputs +VCC, 222, ID2, ID1, ID0, and 124. It is connected to the PCMCIA CARD 120 and the BIOS EPROM 108.
- NO CONNECTOR DEFAULT STATE 126(7):** A note indicating the default state for the connector.

Other Components:

- AUDIO MUX 160:** Audio multiplexer.
- 60D:** A component connected to the audio mux.
- 178:** A component connected to the audio mux.
- 177:** A component connected to the audio mux.
- 176:** A component connected to the audio mux.
- 175:** A component connected to the audio mux.
- 174:** A component connected to the audio mux.

FIG. 1E

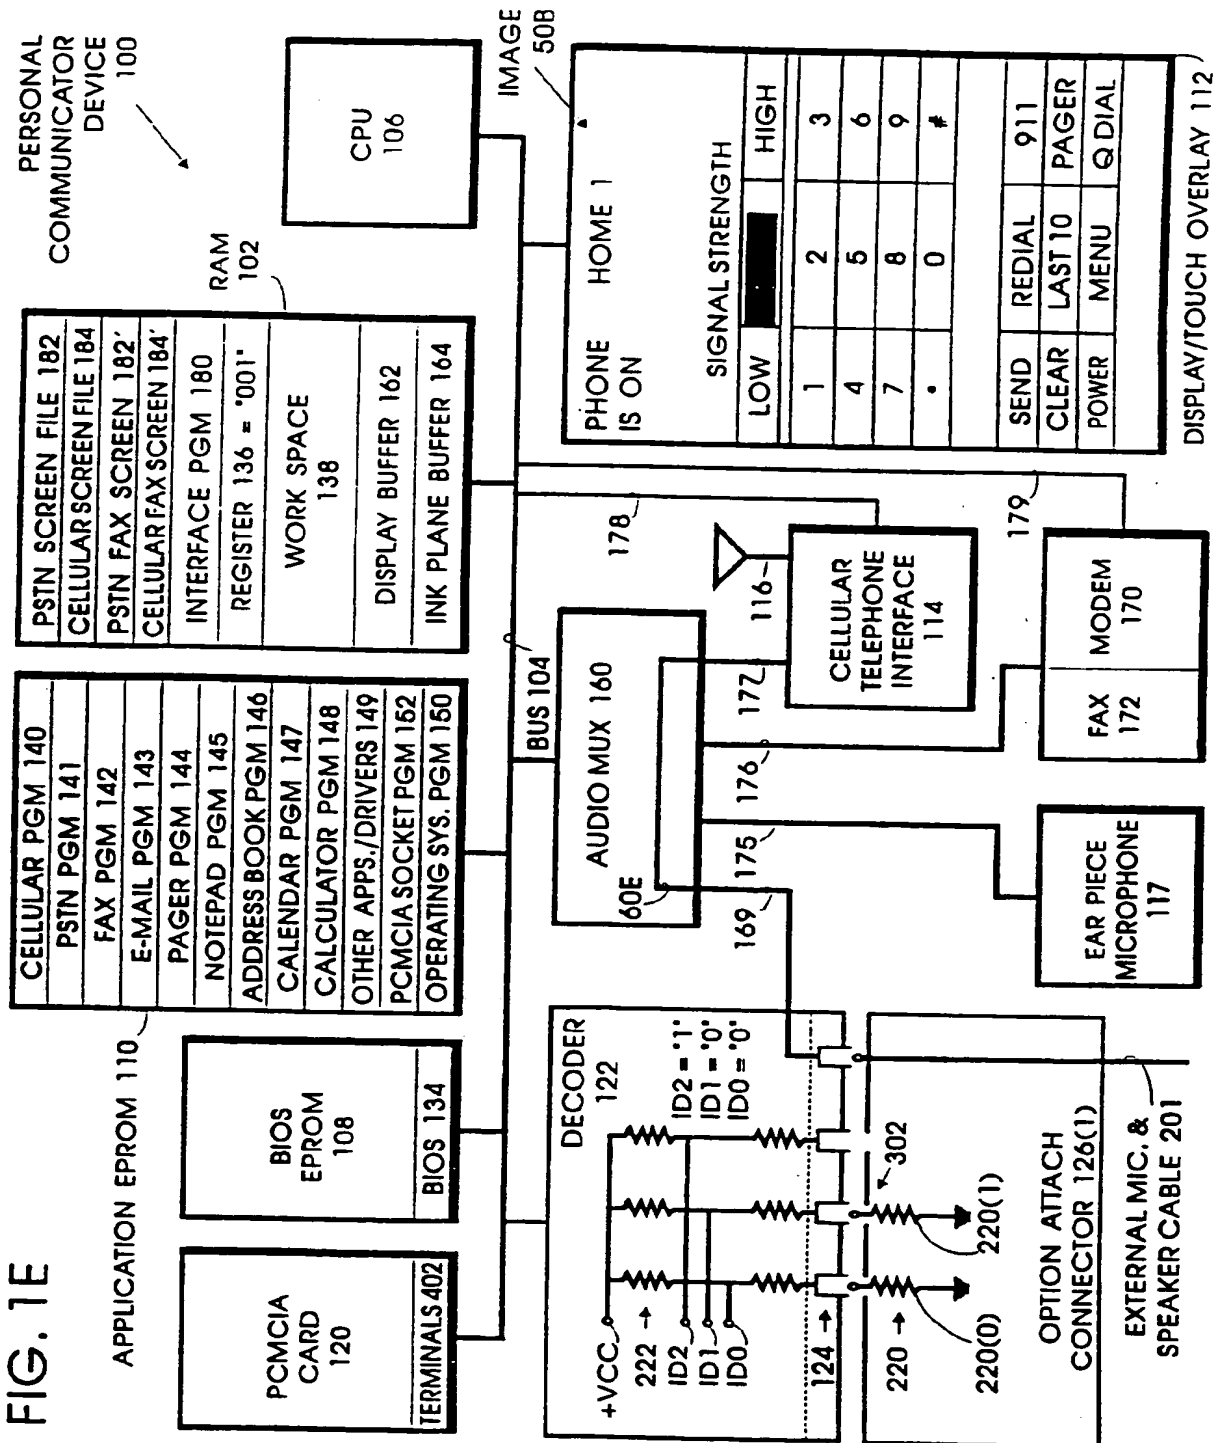


FIG. 2A

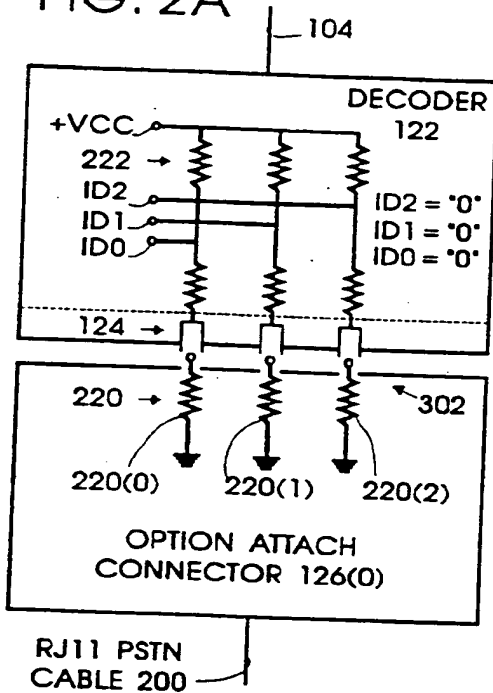


FIG. 2B

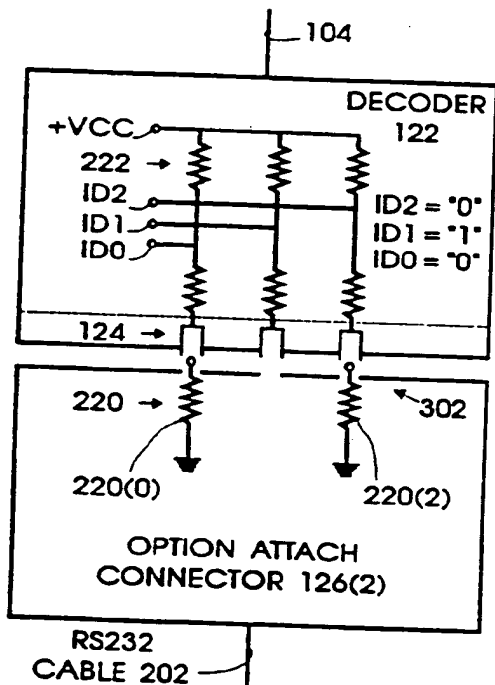
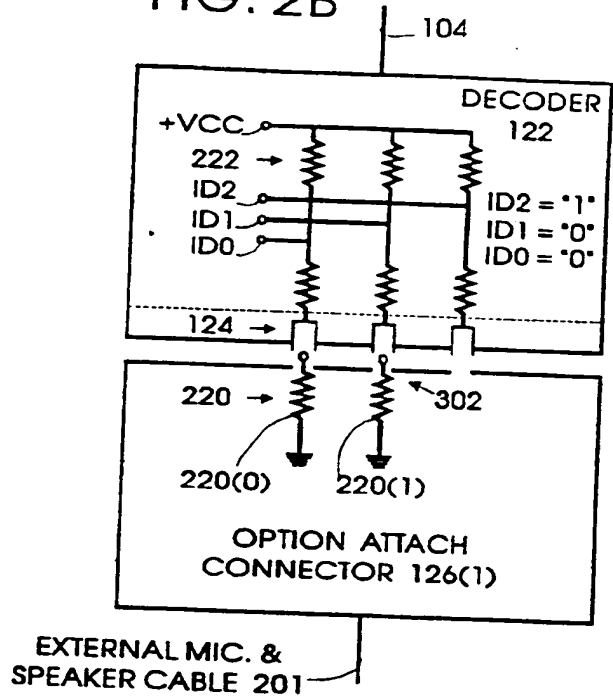


FIG. 2C

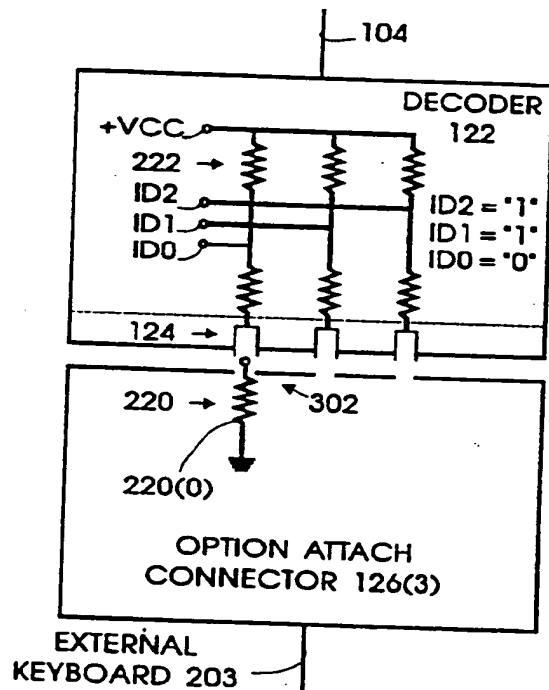


FIG. 2D

FIG. 2E

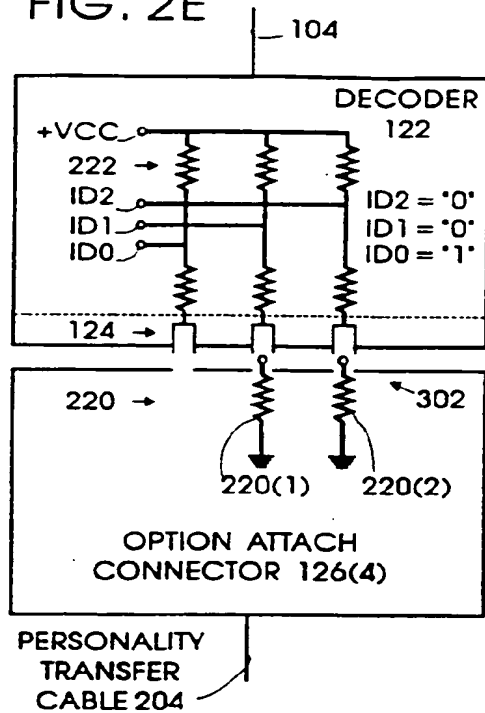


FIG. 2F

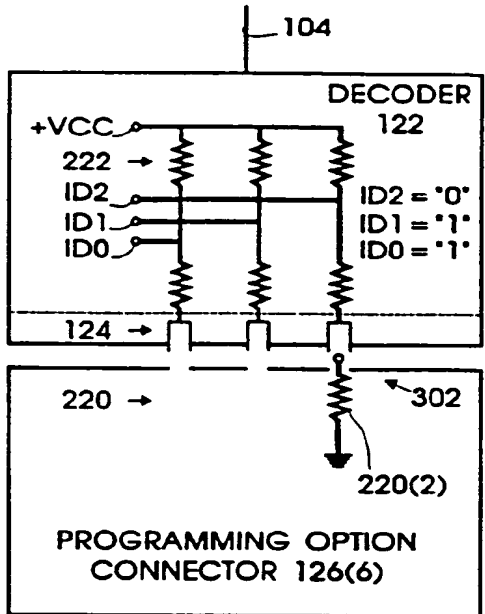
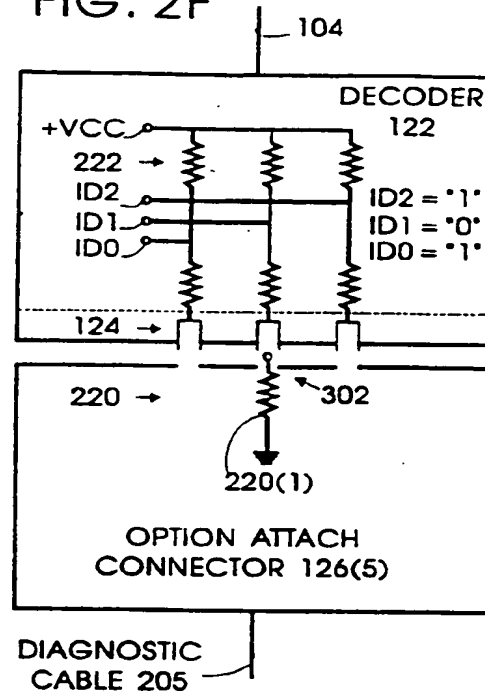


FIG. 2G

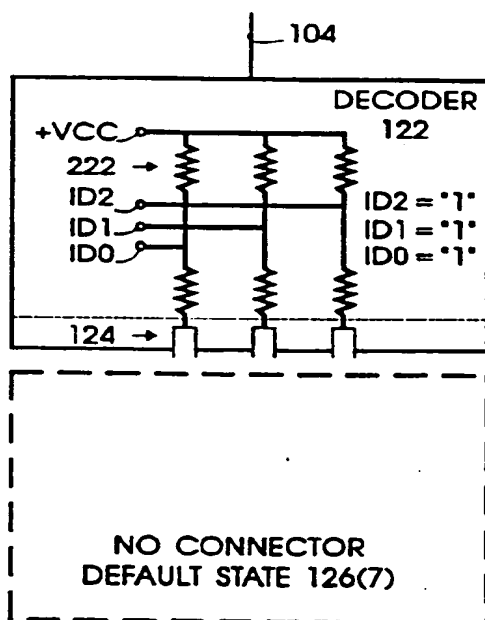


FIG. 2H

FIG. 3

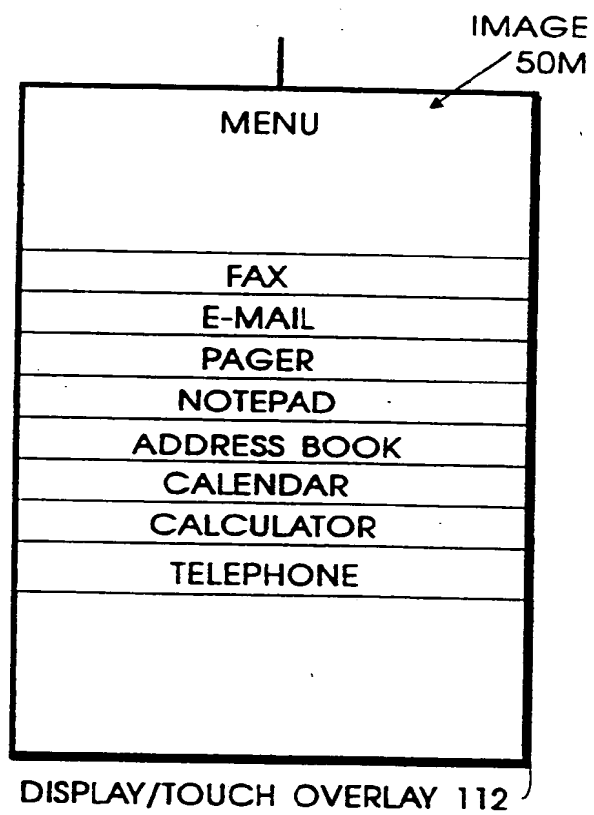


FIG. 4A

400

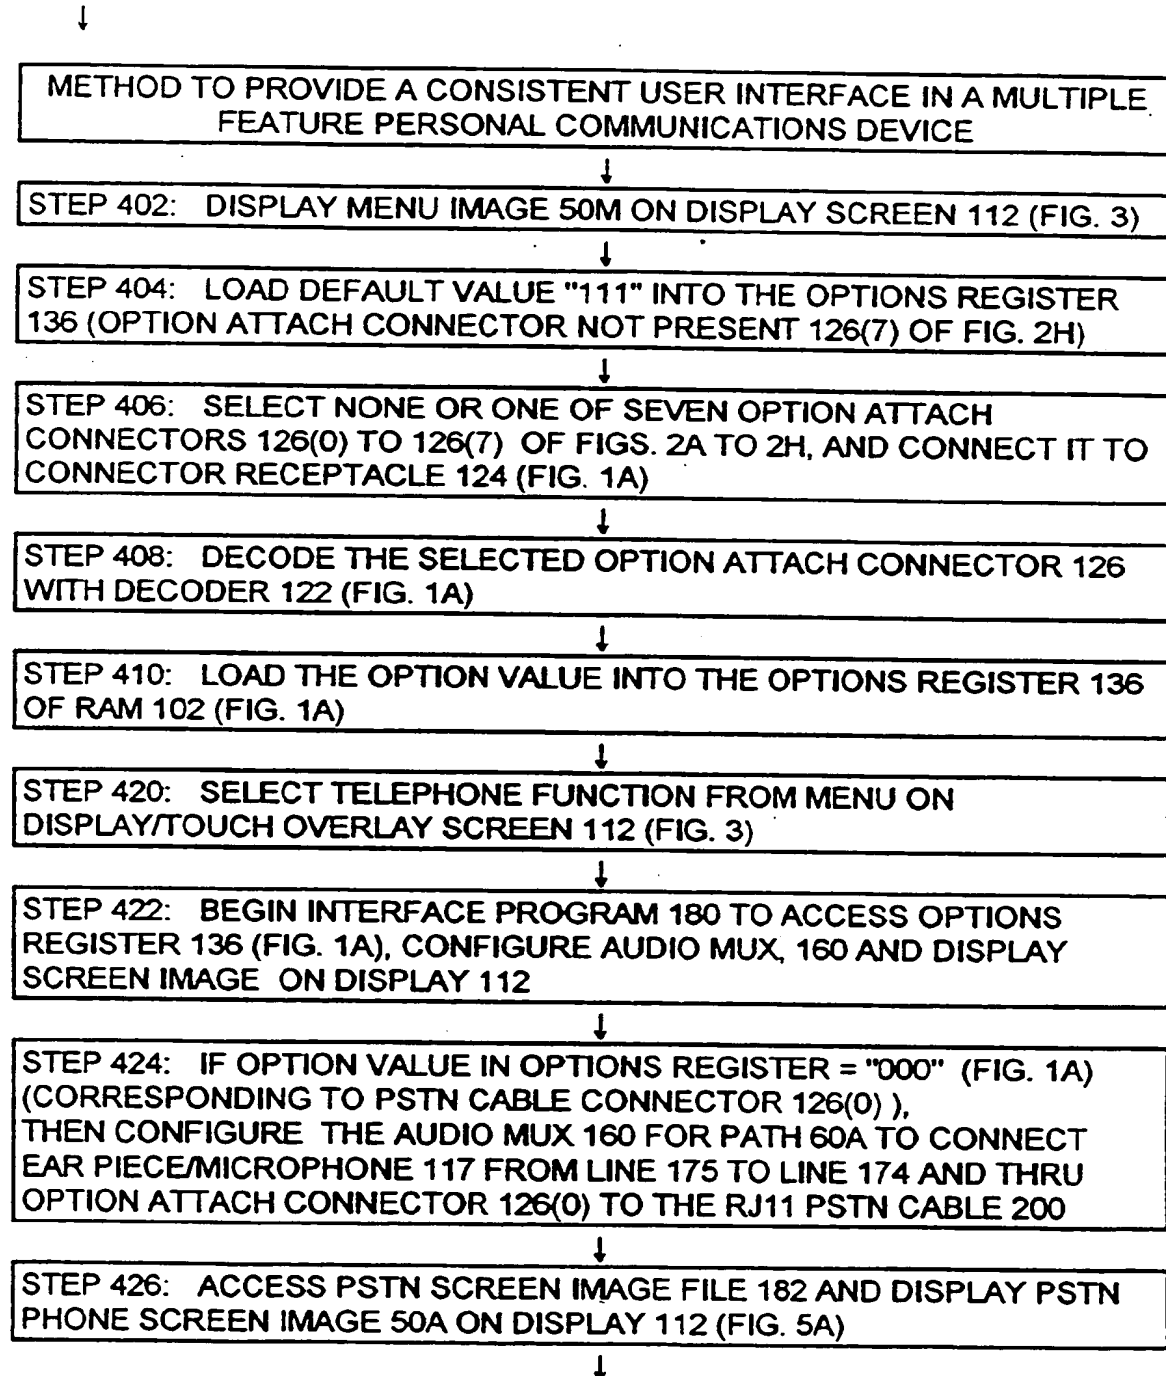


FIG. 4B

400

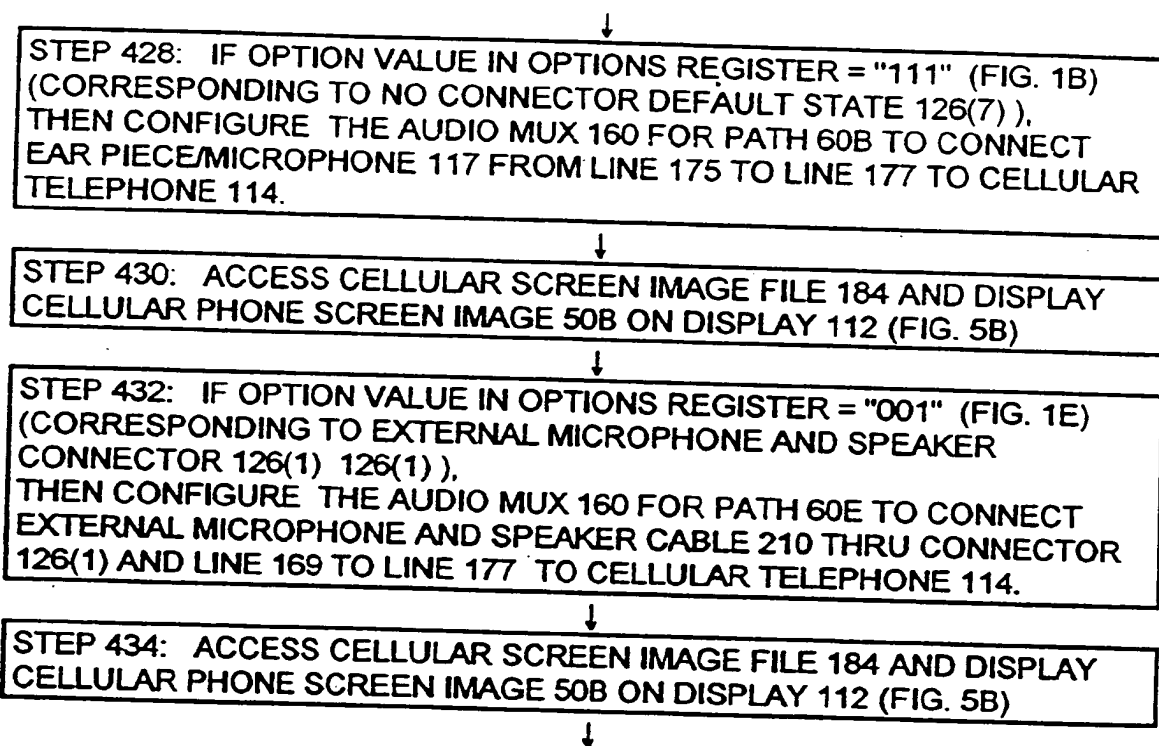


FIG. 4C

400
↓

STEP 440: SELECT FAX RECEIVE FUNCTION FROM MENU ON DISPLAY/TOUCH OVERLAY SCREEN 112 (FIG. 3)

STEP 442: BEGIN INTERFACE PROGRAM 180 TO ACCESS OPTIONS REGISTER 136 (FIG. 1C), CONFIGURE AUDIO MUX. 160 AND DISPLAY SCREEN IMAGE ON DISPLAY 112

STEP 444: IF OPTION VALUE IN OPTIONS REGISTER = "000" (FIG. 1C) (CORRESPONDING TO PSTN CABLE CONNECTOR 126(0)), THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60C TO CONNECT FAX 172/MODEM 170 FROM LINE 176 TO LINE 174 AND THRU OPTION ATTACH CONNECTOR 126(0) TO THE RJ11 PSTN CABLE 200

STEP 446: ACCESS PSTN SCREEN IMAGE FILE 182' AND DISPLAY PSTN FAX SCREEN IMAGE 50C ON DISPLAY 112 (FIG. 5C)

STEP 448: IF OPTION VALUE IN OPTIONS REGISTER = "111" (FIG. 1D) (CORRESPONDING TO NO CONNECTOR DEFAULT STATE 126(7)), THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60D TO CONNECT FAX 172/MODEM 170 FROM LINE 176 TO LINE 177 TO CELLULAR TELEPHONE 114.

STEP 450: ACCESS CELLULAR FAX SCREEN IMAGE FILE 184' AND DISPLAY CELLULAR FAX SCREEN IMAGE 50D ON DISPLAY 112 (FIG. 5D)

FIG. 4D

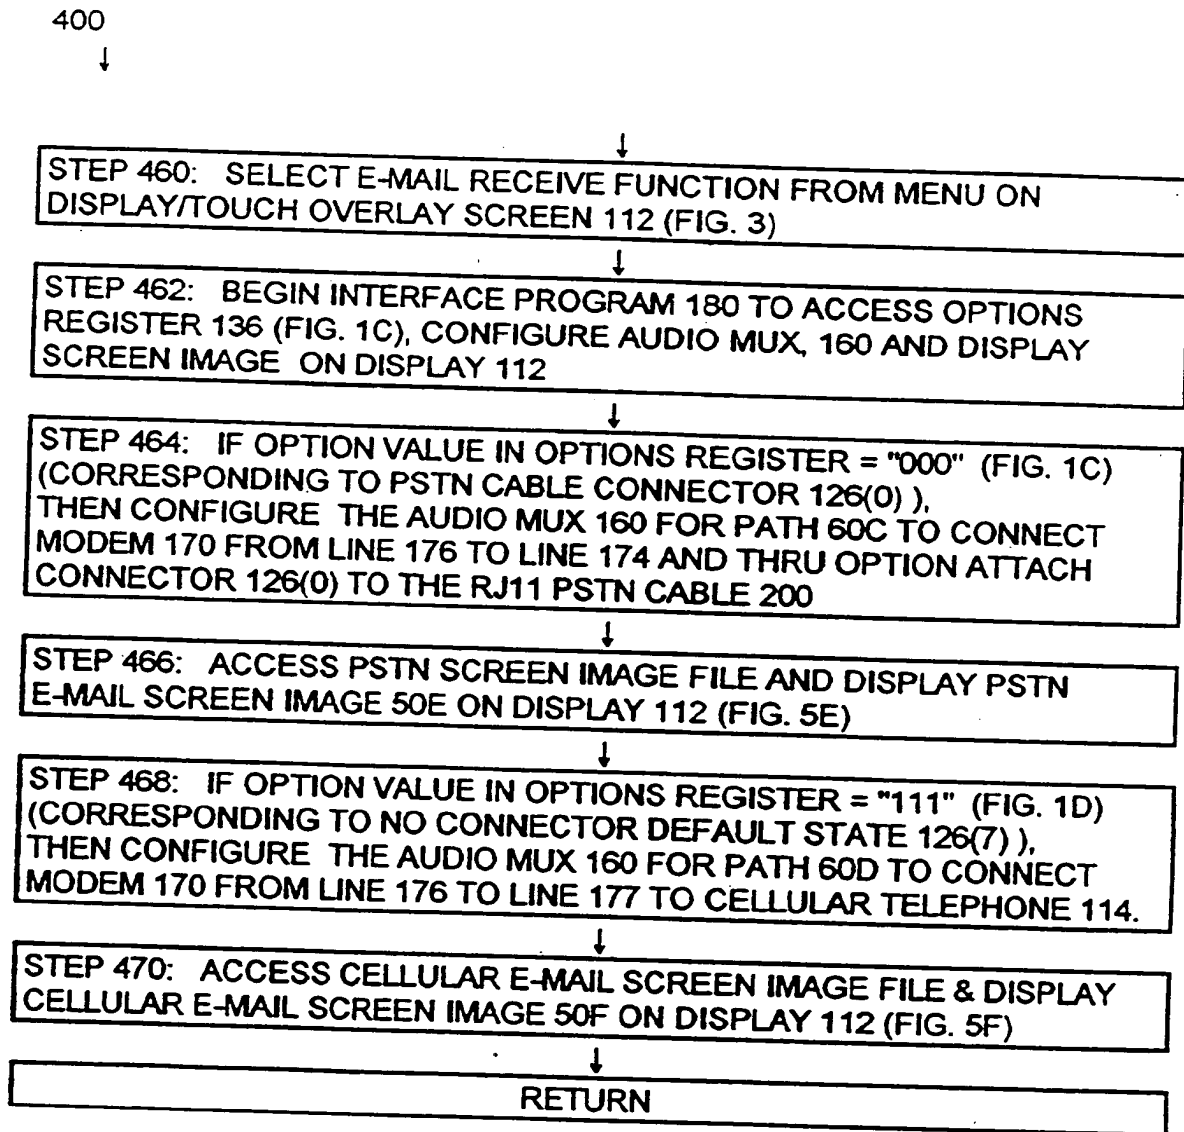


FIG. 5A

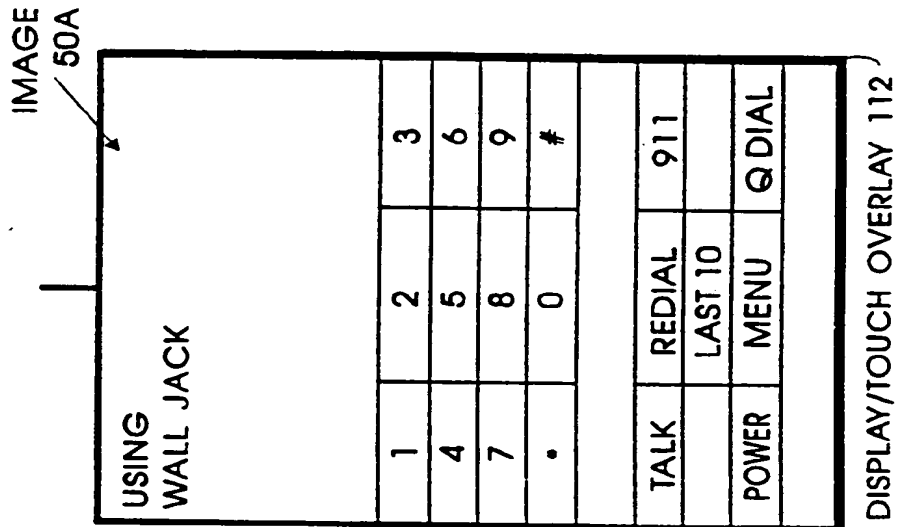


FIG. 5B

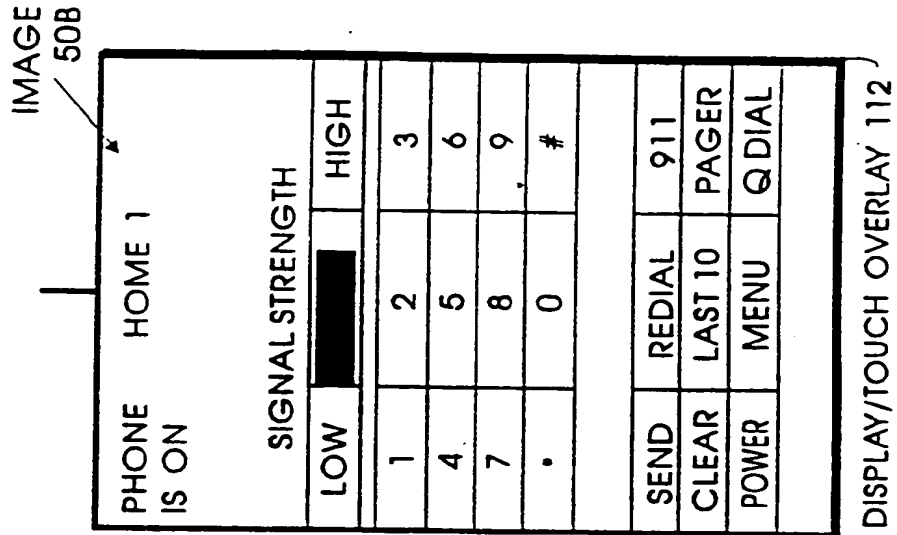


FIG. 5C

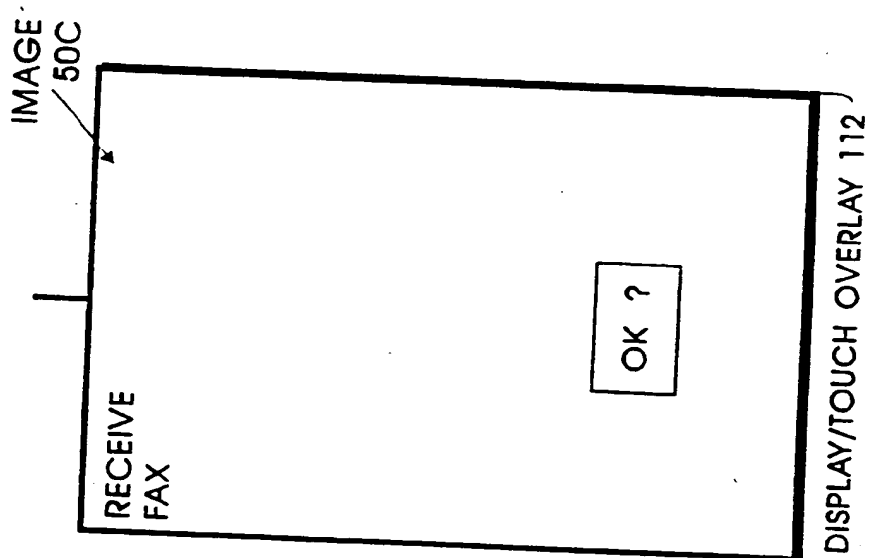


FIG. 5D

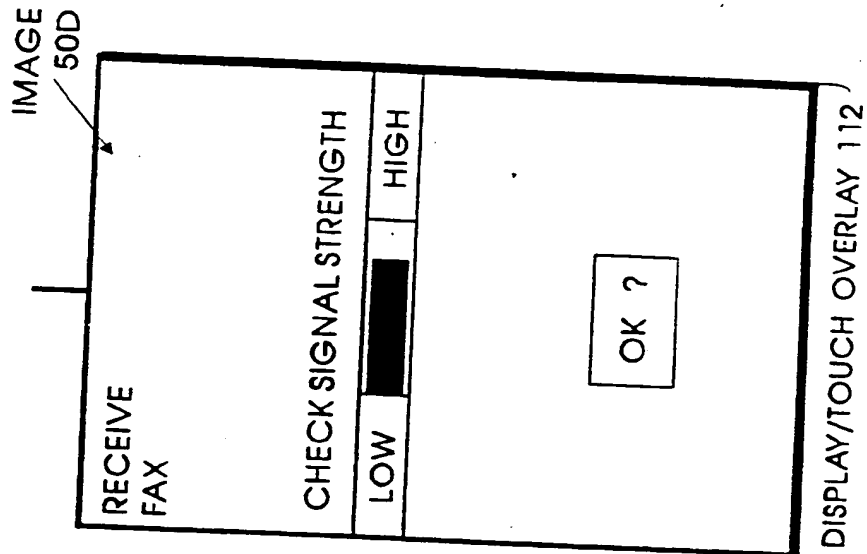


FIG. 5F

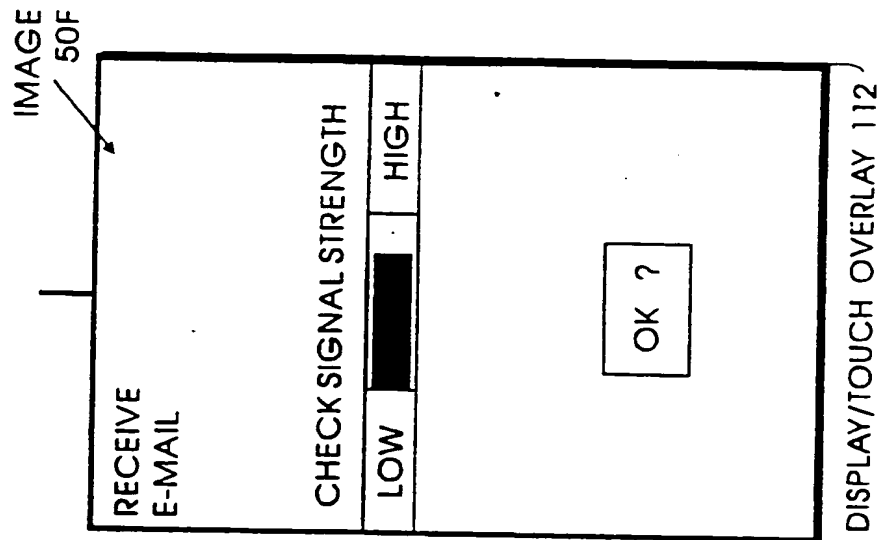
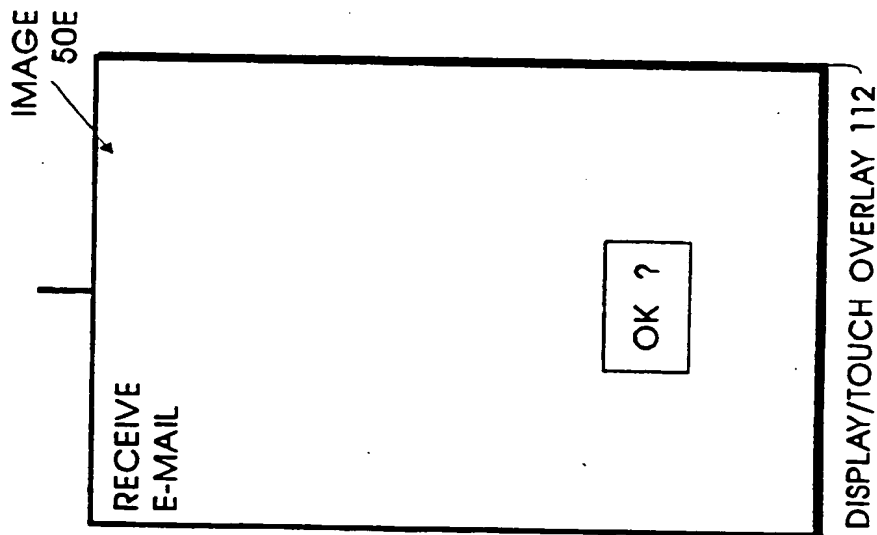


FIG. 5E



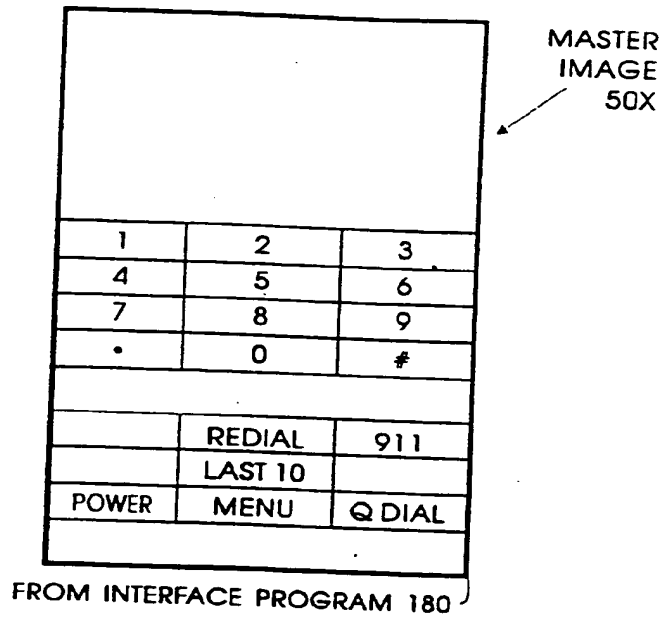


FIG. 6

PSTN CUSTOMIZING IMAGE 50Y

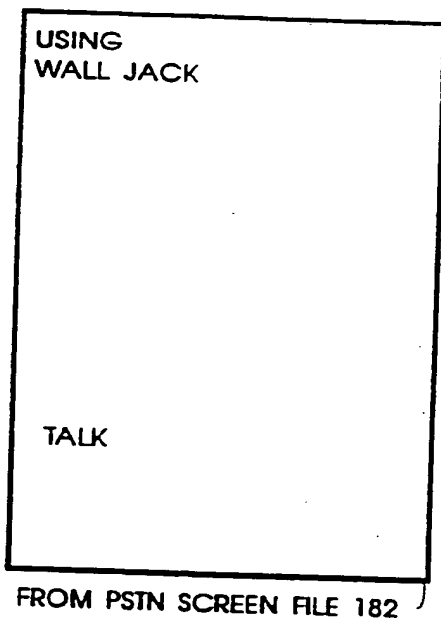


FIG. 6A

CELLULAR CUSTOMIZING IMAGE 50Z


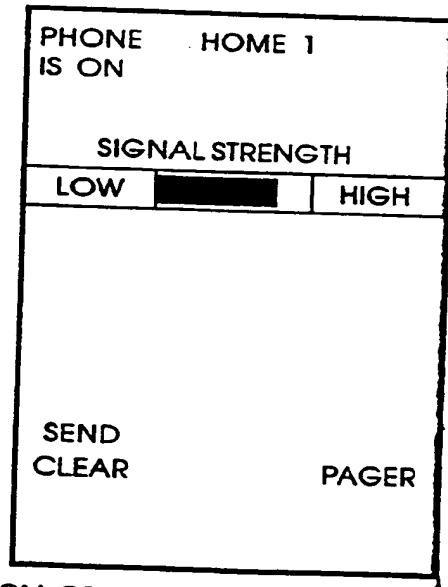


FIG. 6B

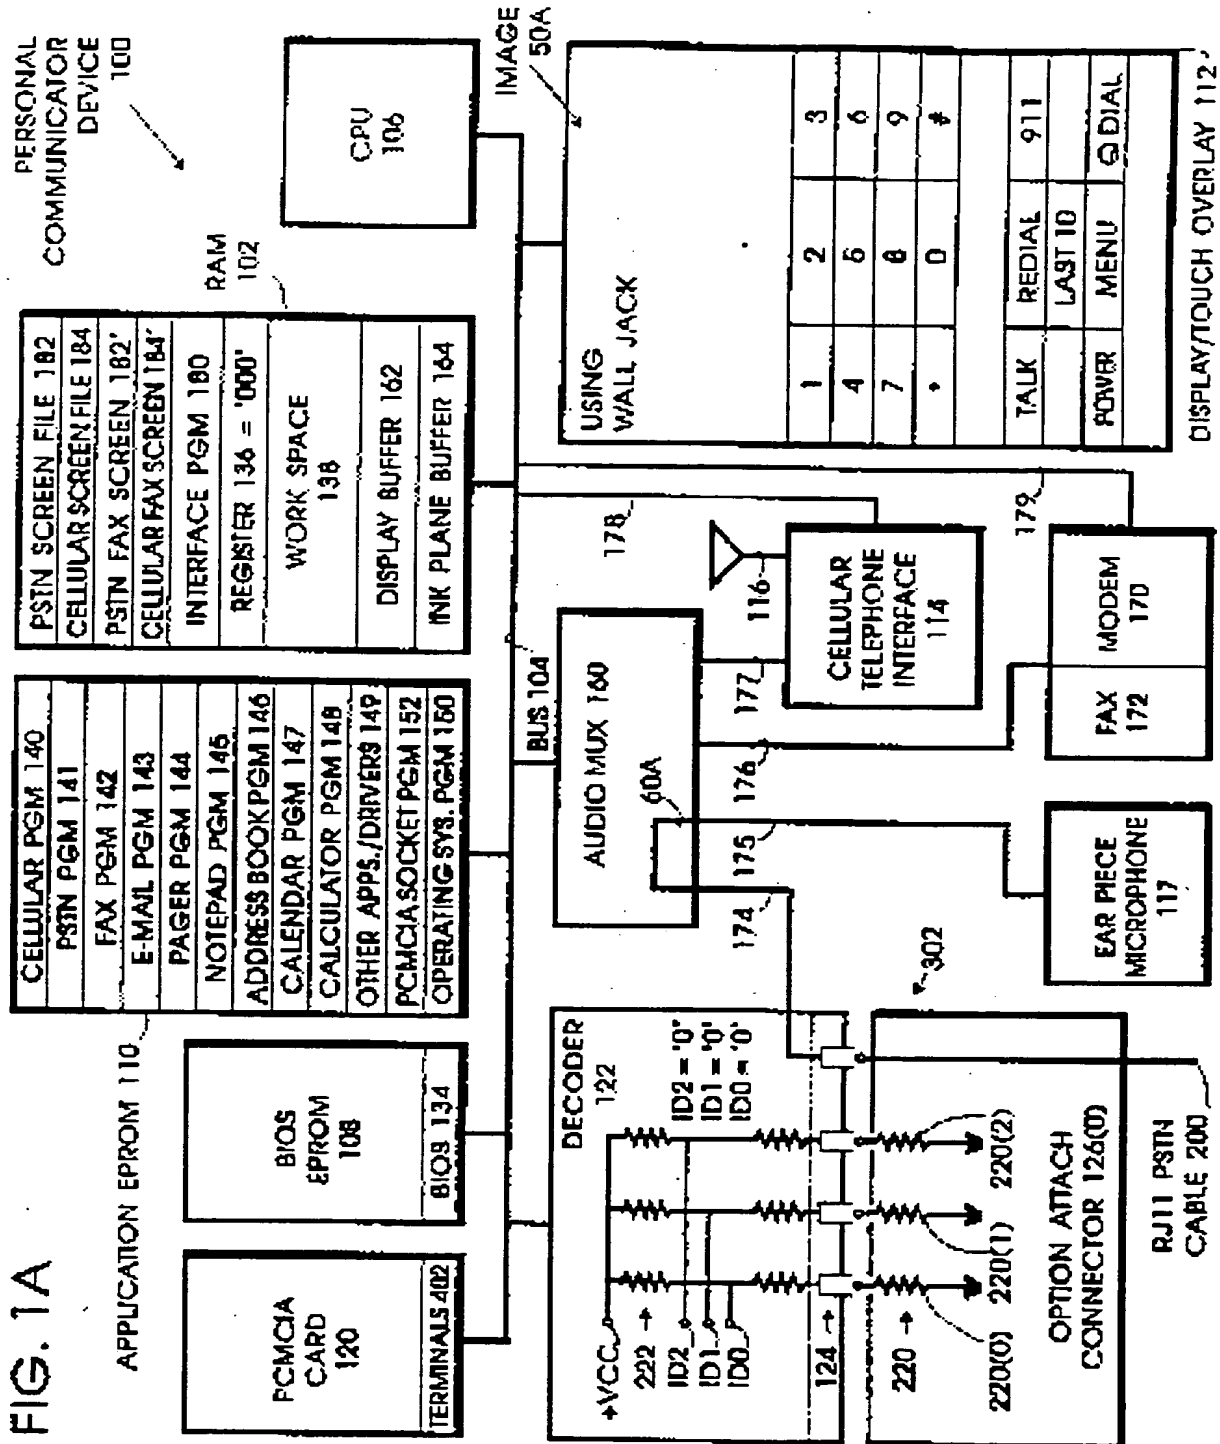

[illegible]

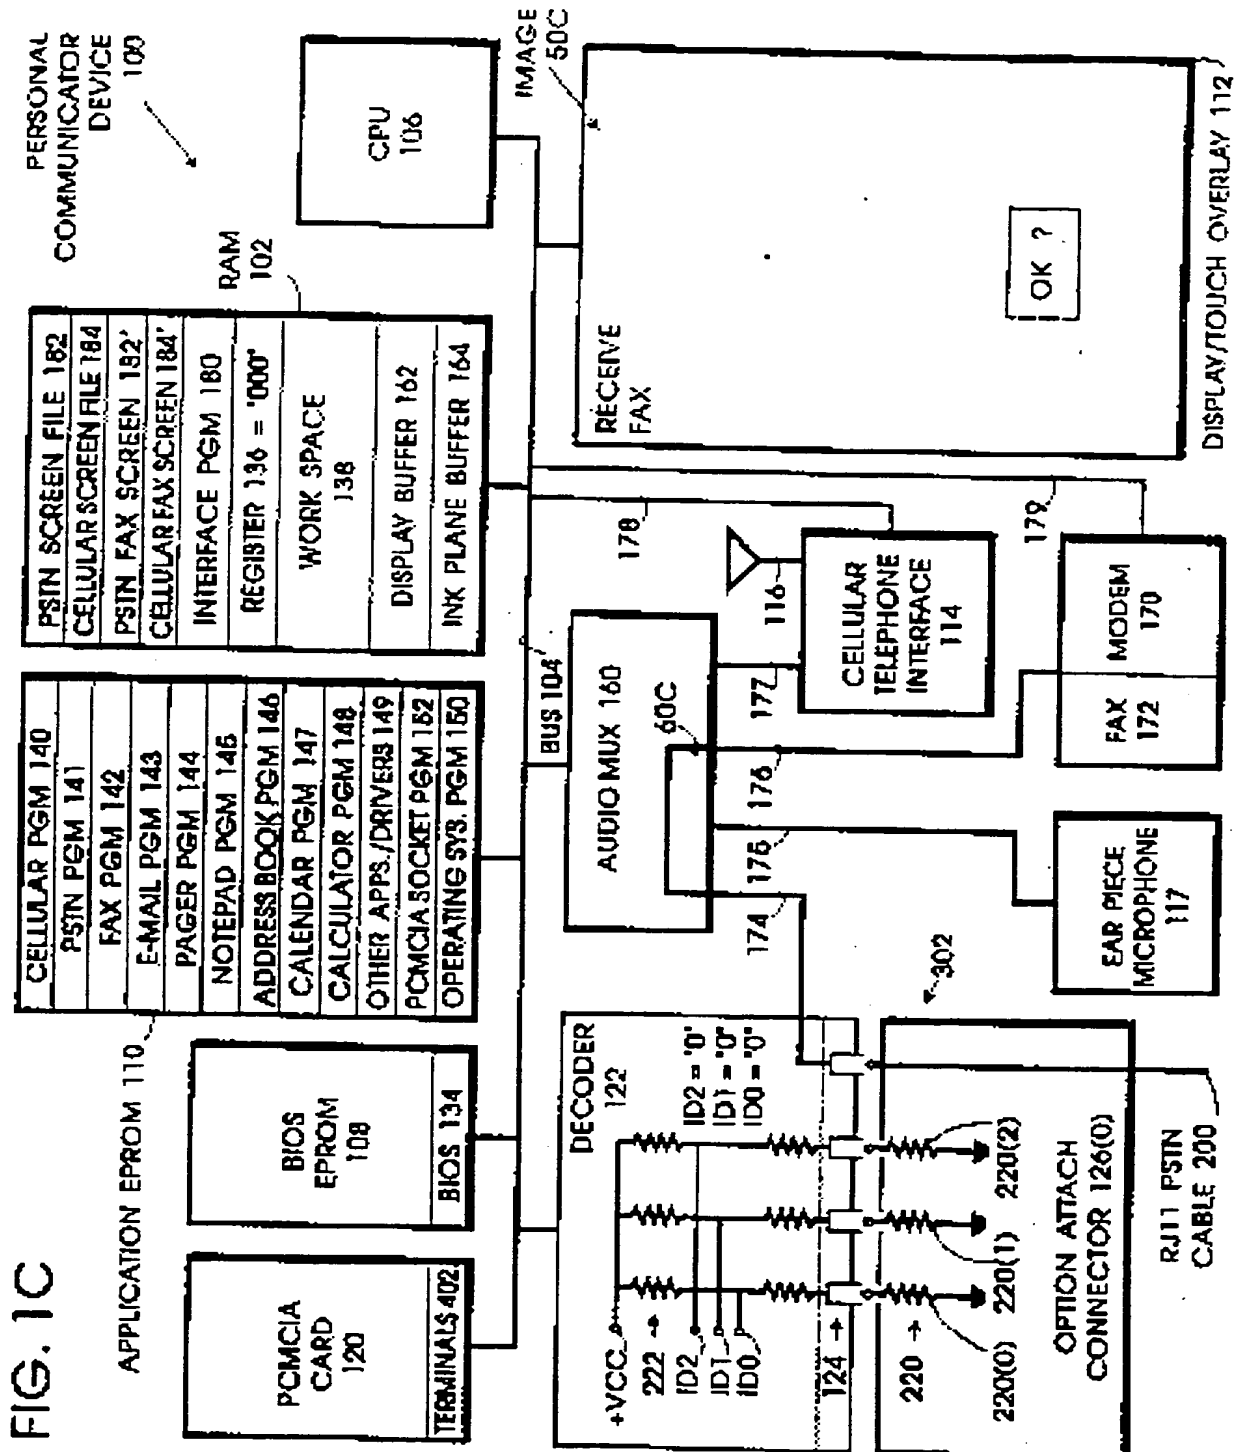
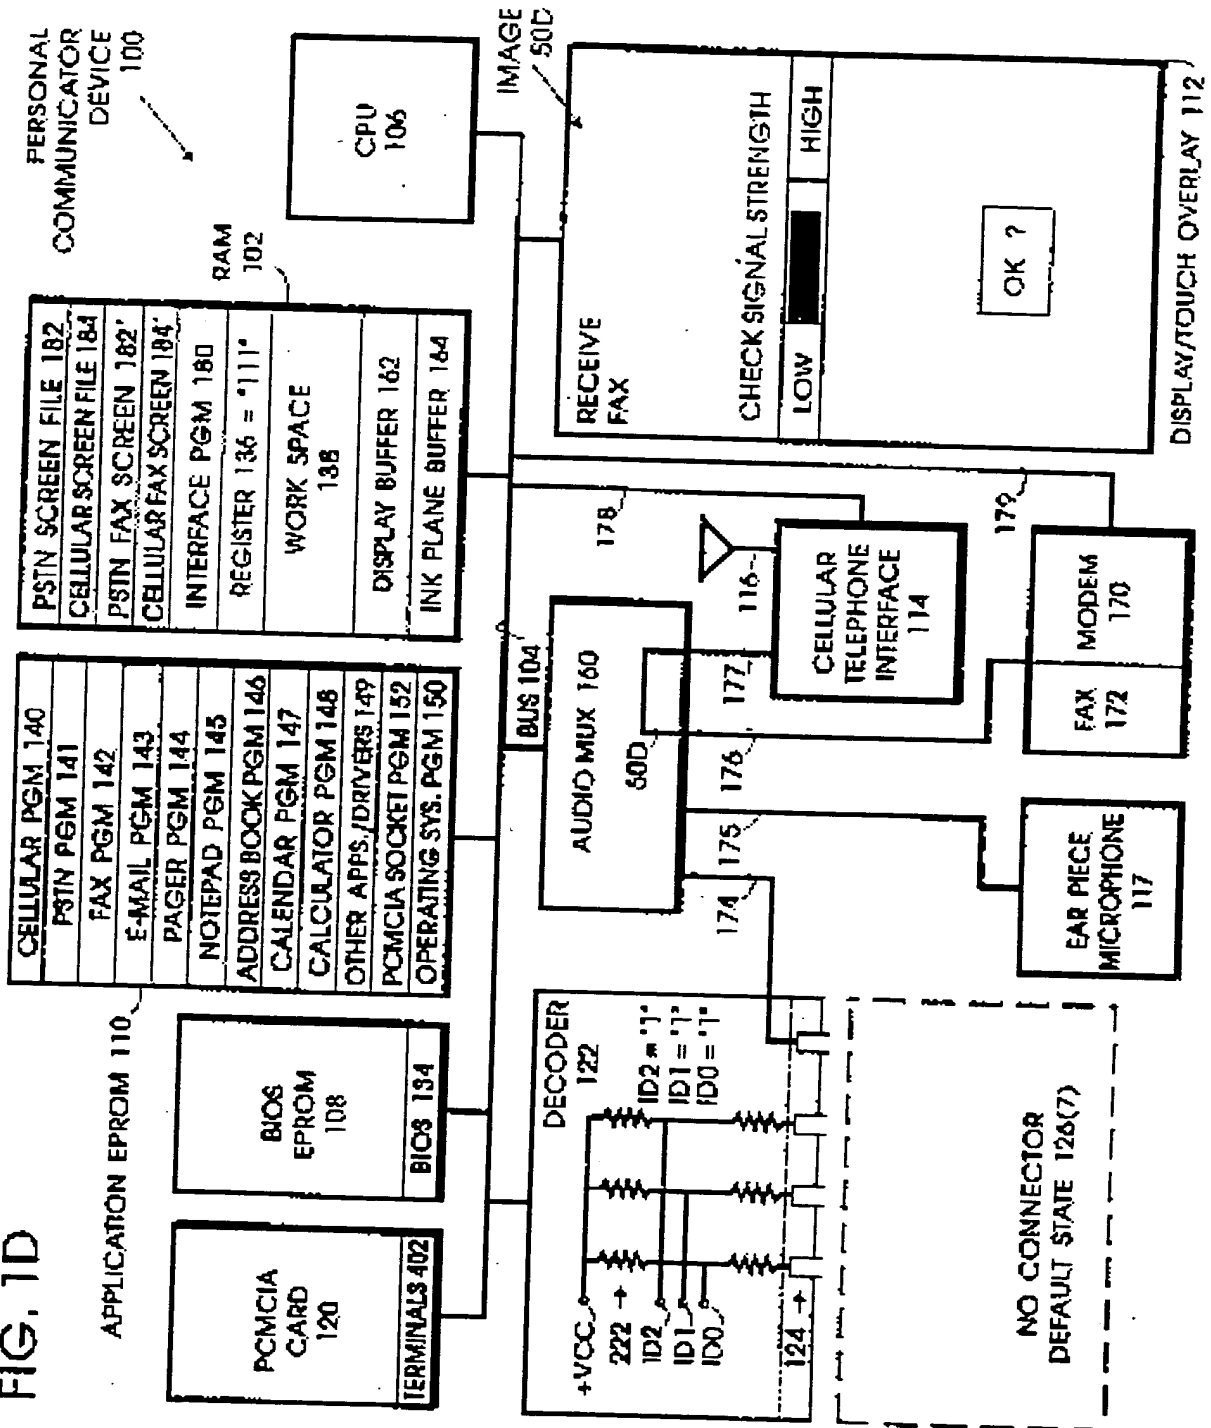


FIG. 1D



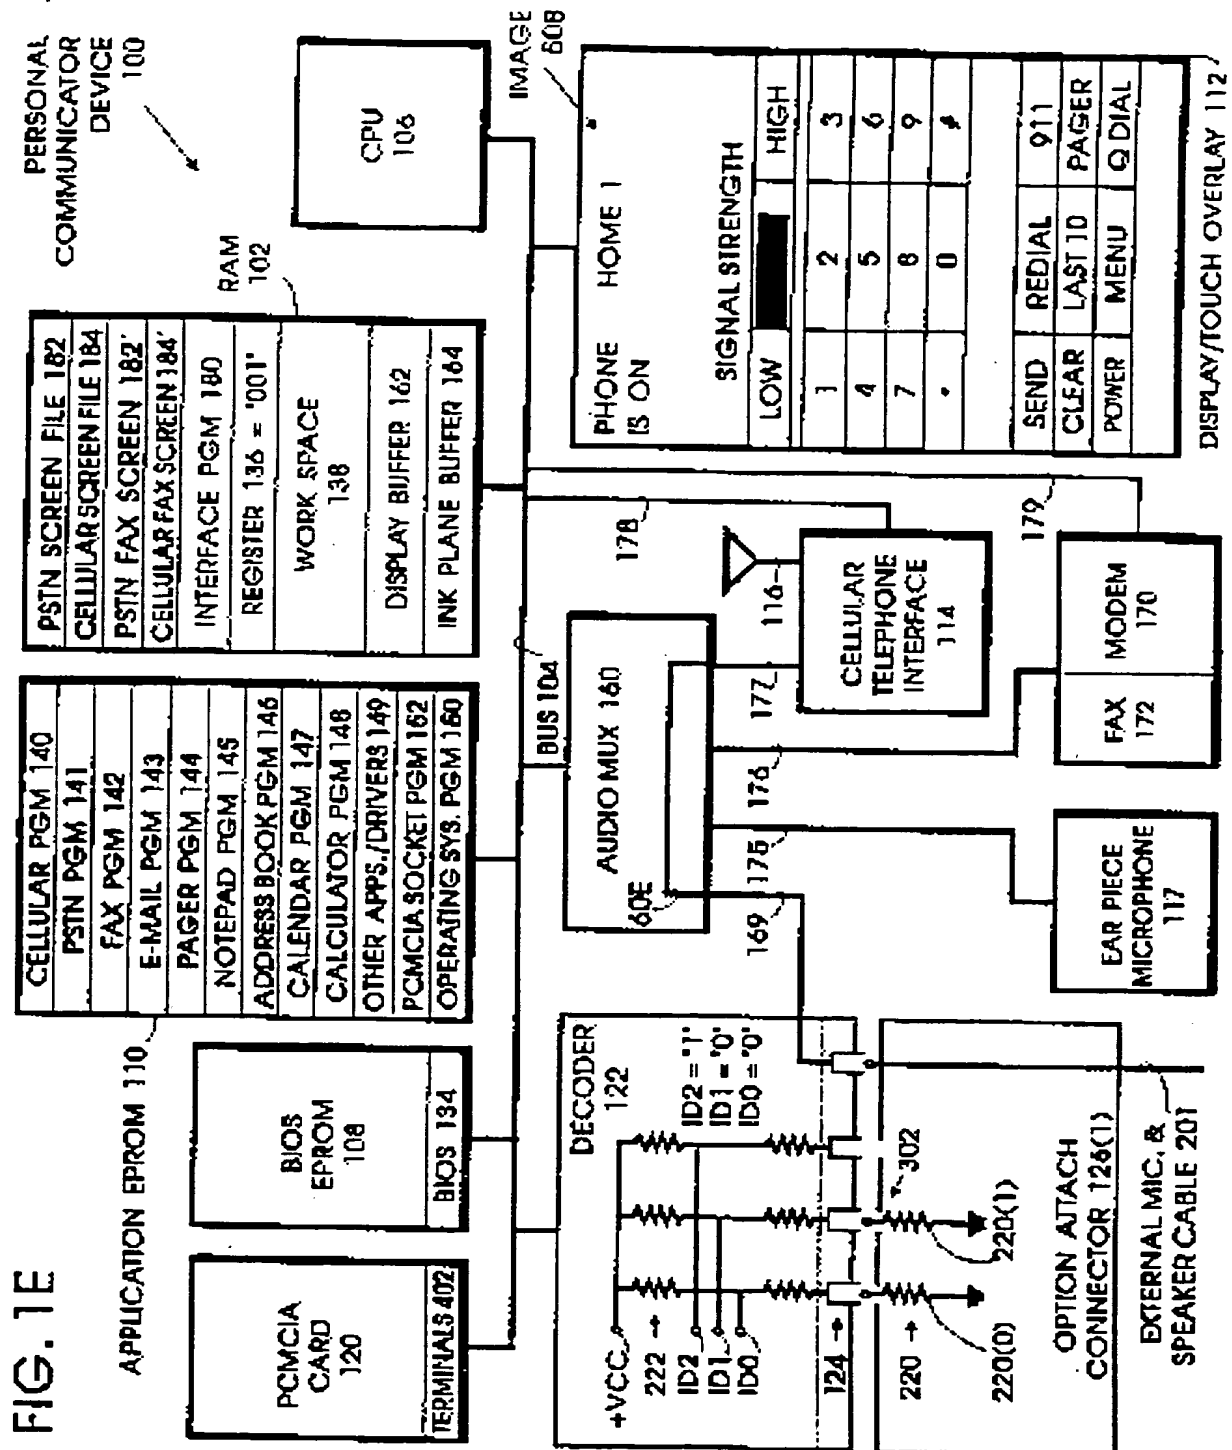


FIG. 2A

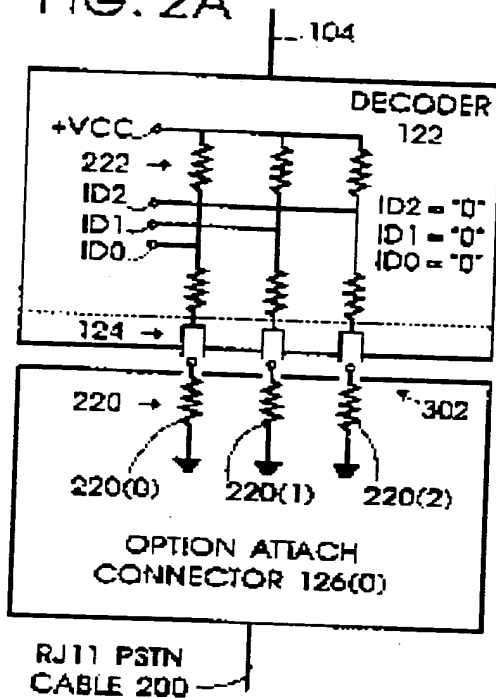


FIG. 2B

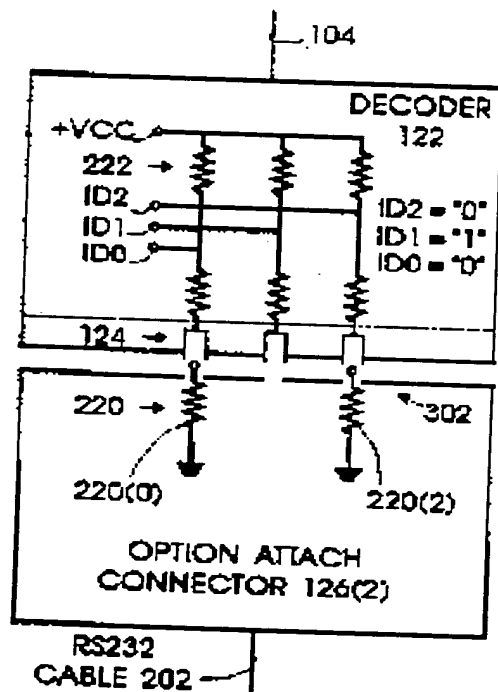
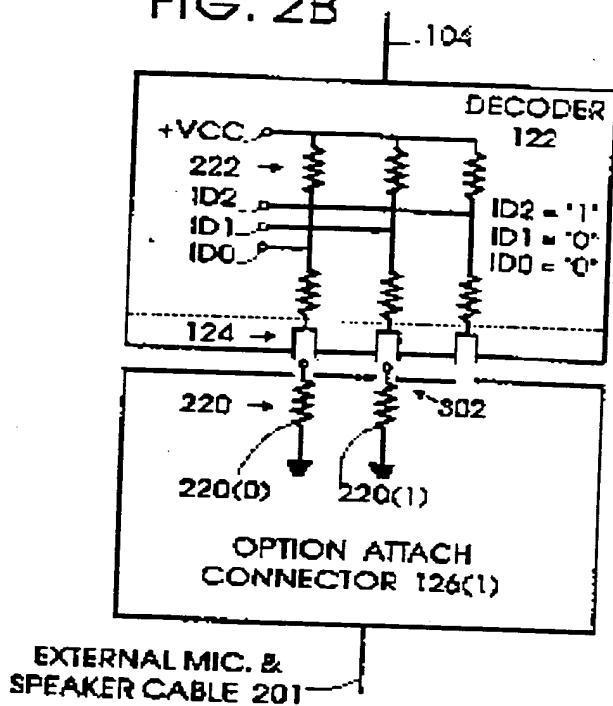


FIG. 2C

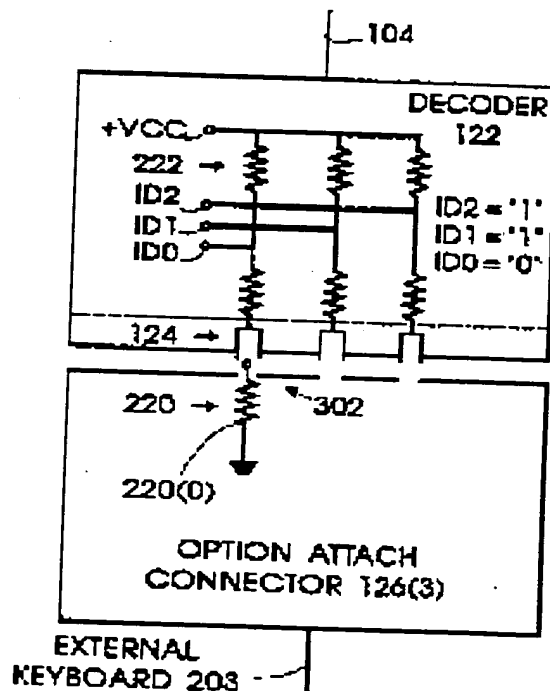


FIG. 2D

FIG. 2E

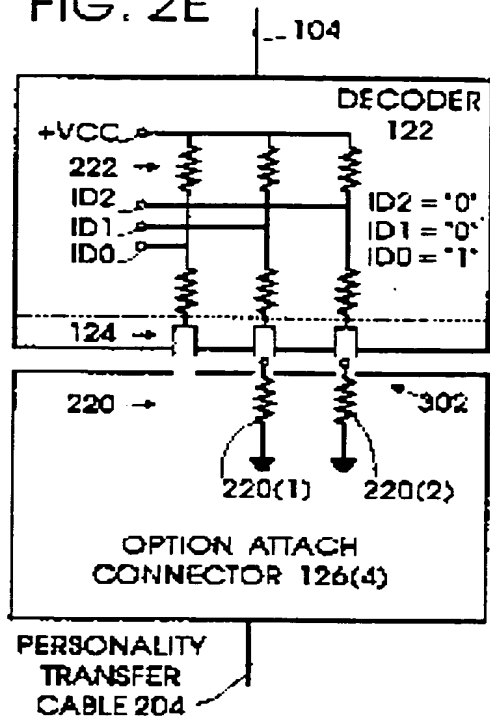


FIG. 2F

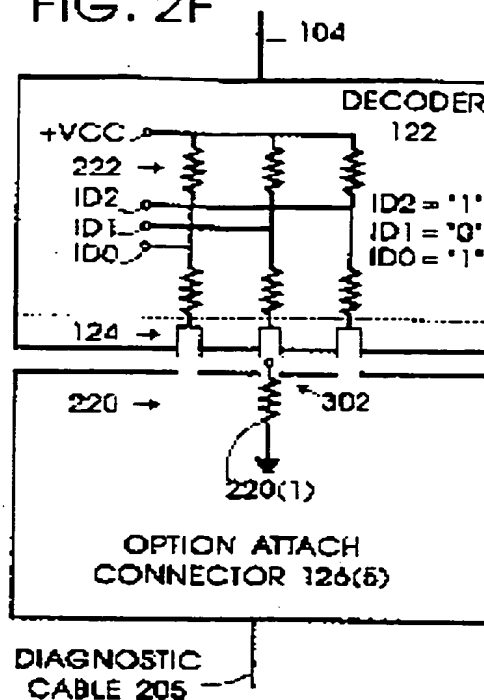


FIG. 2G

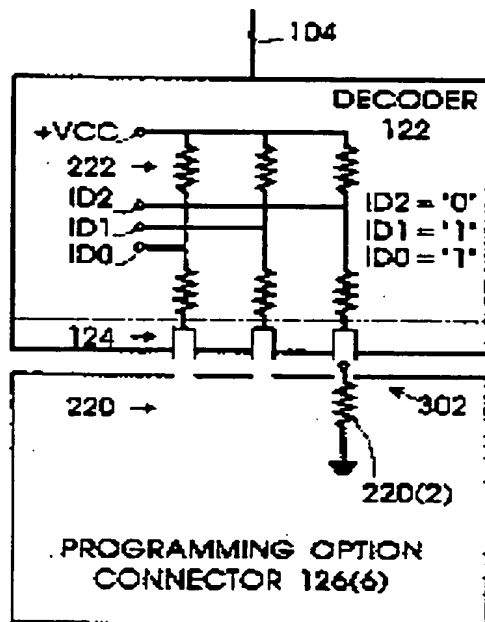


FIG. 2H

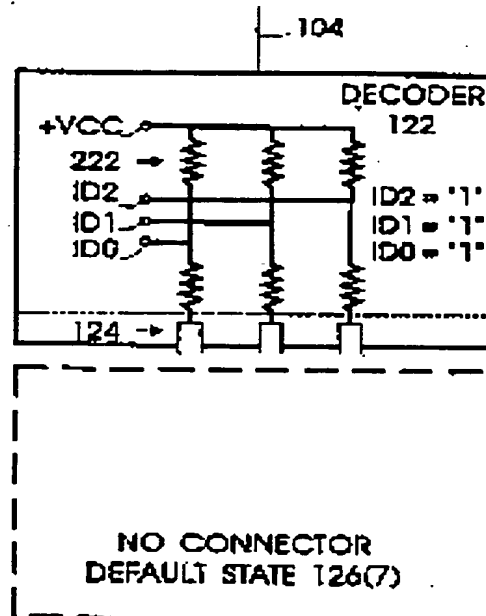


FIG. 3

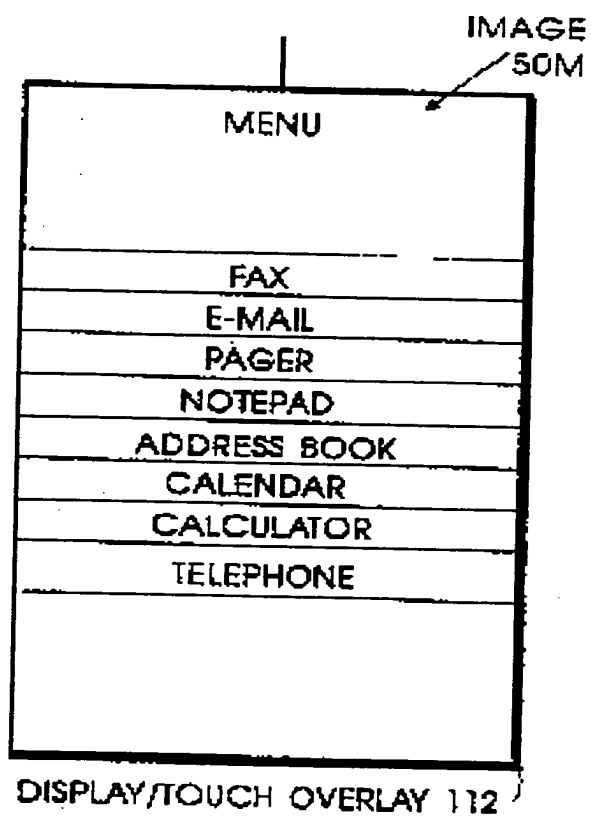


FIG. 4A

400

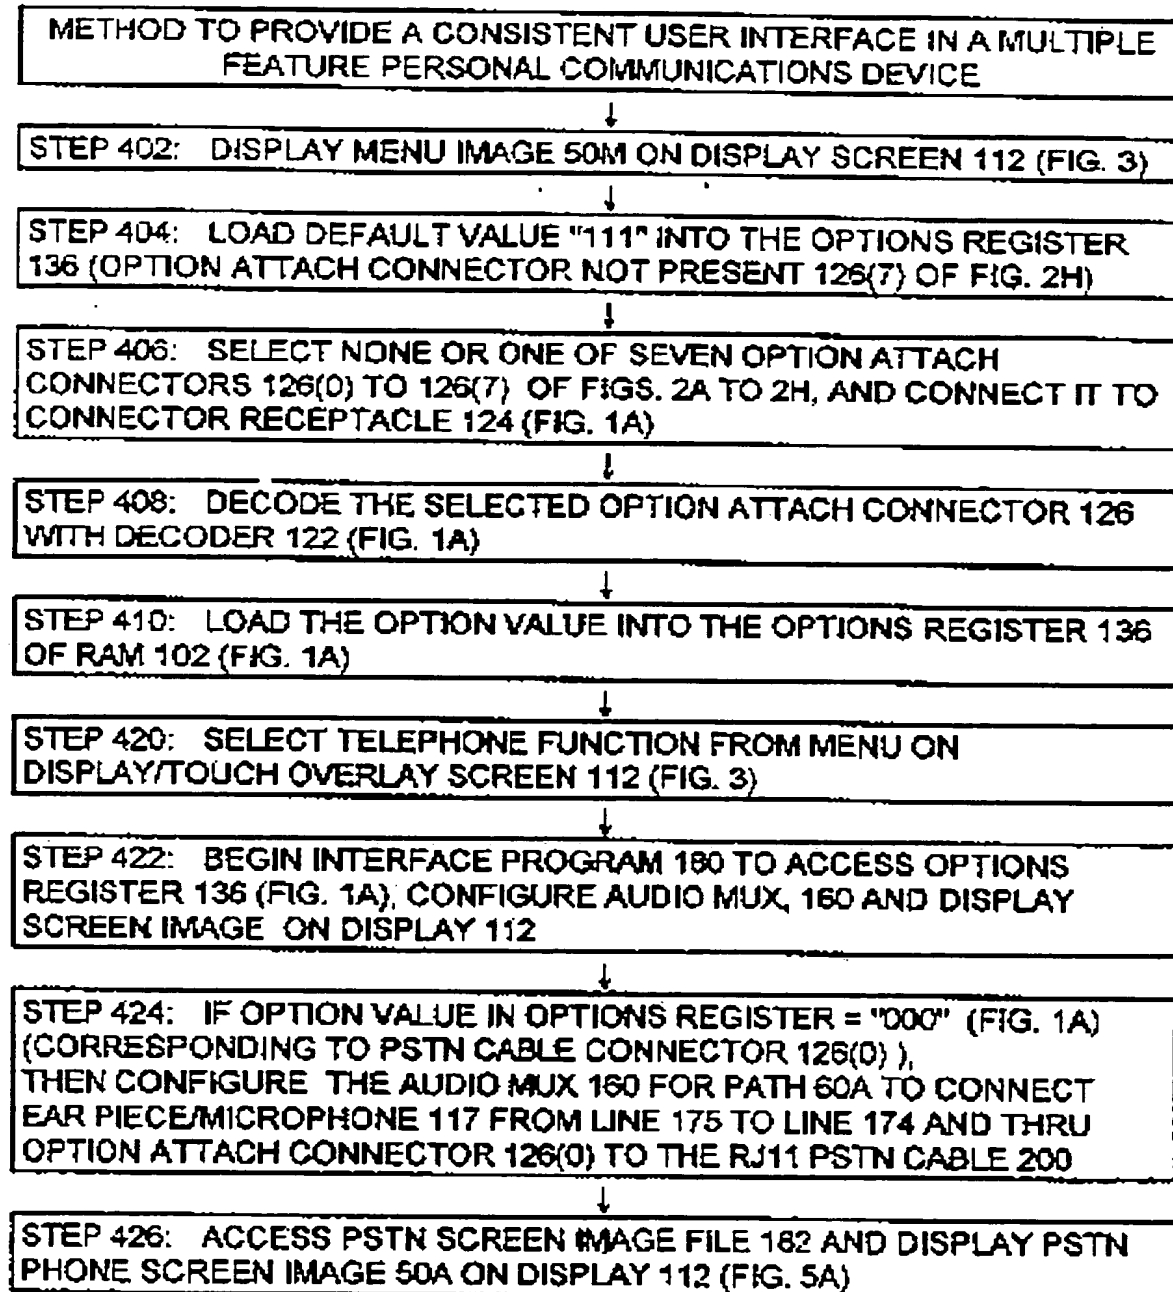


FIG. 4B

400

↓

STEP 428: IF OPTION VALUE IN OPTIONS REGISTER = "111" (FIG. 1B) (CORRESPONDING TO NO CONNECTOR DEFAULT STATE 126(7)), THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60B TO CONNECT EAR PIECE/MICROPHONE 117 FROM LINE 175 TO LINE 177 TO CELLULAR TELEPHONE 114.

↓

STEP 430: ACCESS CELLULAR SCREEN IMAGE FILE 184 AND DISPLAY CELLULAR PHONE SCREEN IMAGE 50B ON DISPLAY 112 (FIG. 5B)

↓

STEP 432: IF OPTION VALUE IN OPTIONS REGISTER = "001" (FIG. 1E) (CORRESPONDING TO EXTERNAL MICROPHONE AND SPEAKER CONNECTOR 126(1) 126(1)), THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60E TO CONNECT EXTERNAL MICROPHONE AND SPEAKER CABLE 210 THRU CONNECTOR 126(1) AND LINE 169 TO LINE 177 TO CELLULAR TELEPHONE 114.

↓

STEP 434: ACCESS CELLULAR SCREEN IMAGE FILE 184 AND DISPLAY CELLULAR PHONE SCREEN IMAGE 50B ON DISPLAY 112 (FIG. 5B)

↓

FIG. 4C

400
↓

STEP 440: SELECT FAX RECEIVE FUNCTION FROM MENU ON
DISPLAY/TOUCH OVERLAY SCREEN 112 (FIG. 3)

STEP 442: BEGIN INTERFACE PROGRAM 180 TO ACCESS OPTIONS
REGISTER 136 (FIG. 1C), CONFIGURE AUDIO MUX 160 AND DISPLAY
SCREEN IMAGE ON DISPLAY 112

STEP 444: IF OPTION VALUE IN OPTIONS REGISTER = "000" (FIG. 1C)
(CORRESPONDING TO PSTN CABLE CONNECTOR 126(0)),
THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60C TO CONNECT
FAX 172/MODEM 170 FROM LINE 176 TO LINE 174 AND THRU OPTION
ATTACH CONNECTOR 126(0) TO THE RJ11 PSTN CABLE 200

STEP 446: ACCESS PSTN SCREEN IMAGE FILE 182' AND DISPLAY PSTN
FAX SCREEN IMAGE 50C ON DISPLAY 112 (FIG. 5C)

STEP 448: IF OPTION VALUE IN OPTIONS REGISTER = "111" (FIG. 1D)
(CORRESPONDING TO NO CONNECTOR DEFAULT STATE 126(7)),
THEN CONFIGURE THE AUDIO MUX 160 FOR PATH 60D TO CONNECT
FAX 172/MODEM 170 FROM LINE 176 TO LINE 177 TO CELLULAR
TELEPHONE 114.

STEP 450: ACCESS CELLULAR FAX SCREEN IMAGE FILE 184' AND
DISPLAY CELLULAR FAX SCREEN IMAGE 50D ON DISPLAY 112 (FIG. 5D)

FIG. 4D

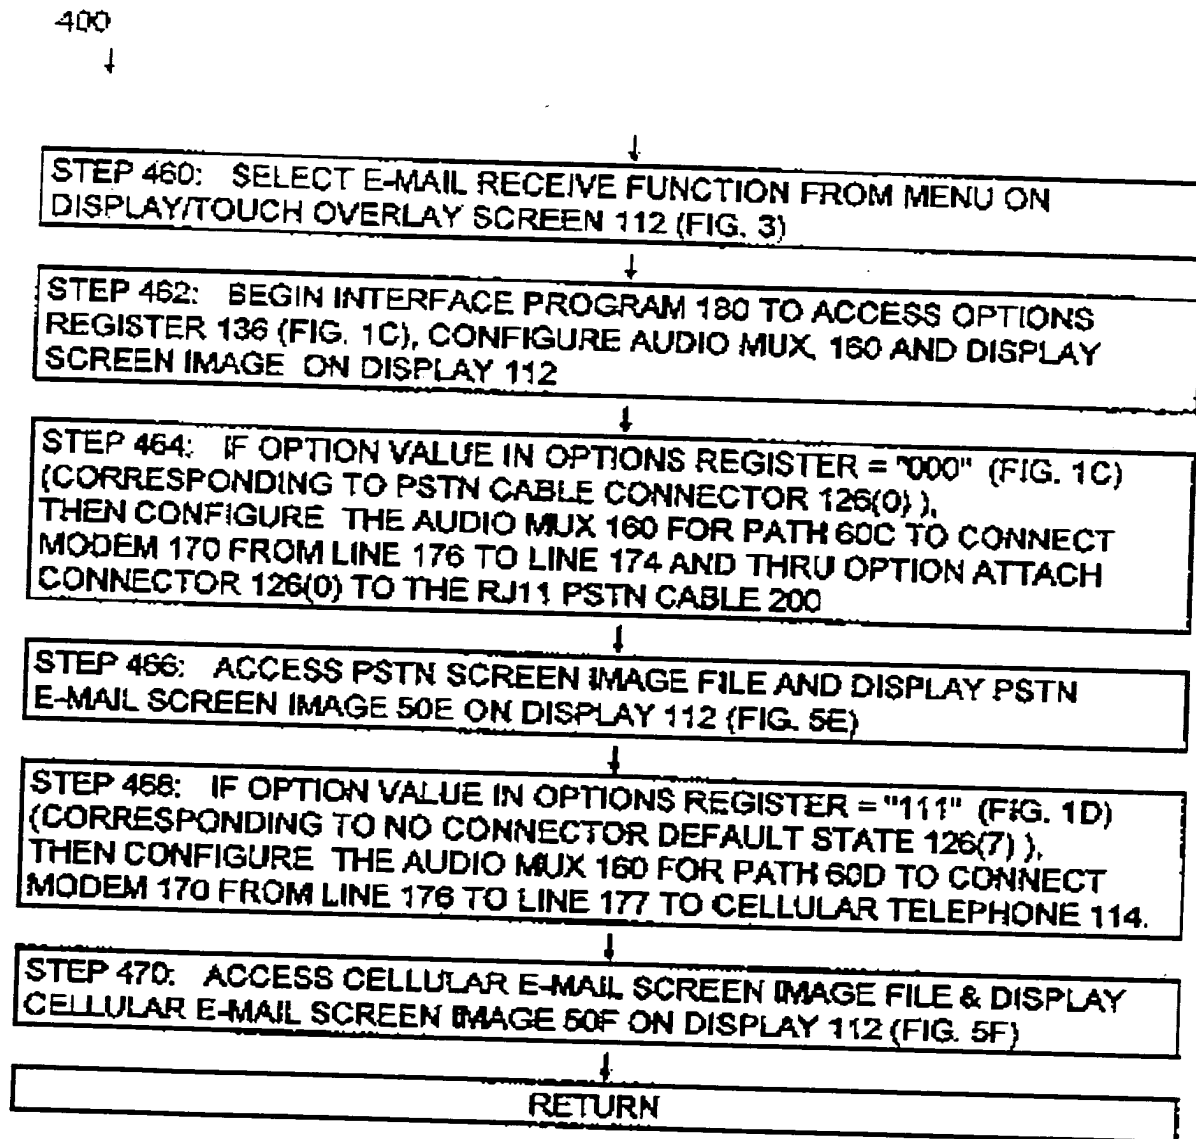


FIG. 5A

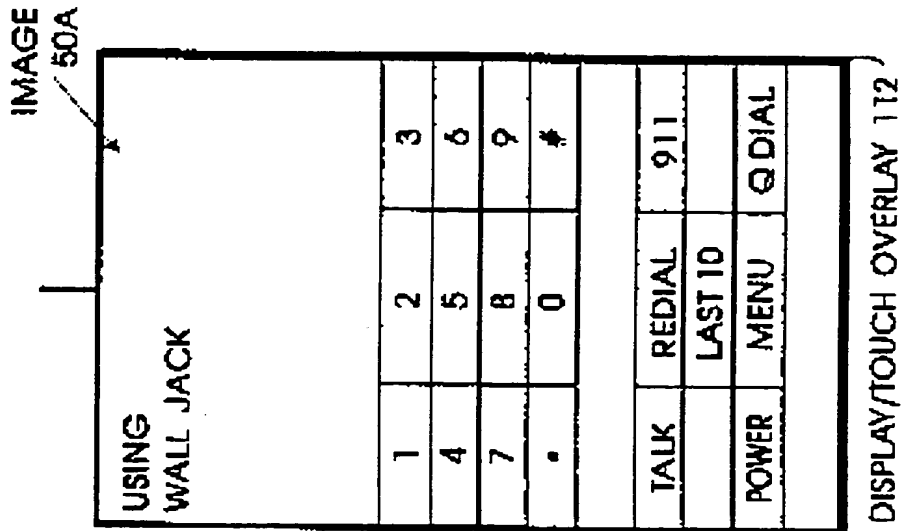


FIG. 5B

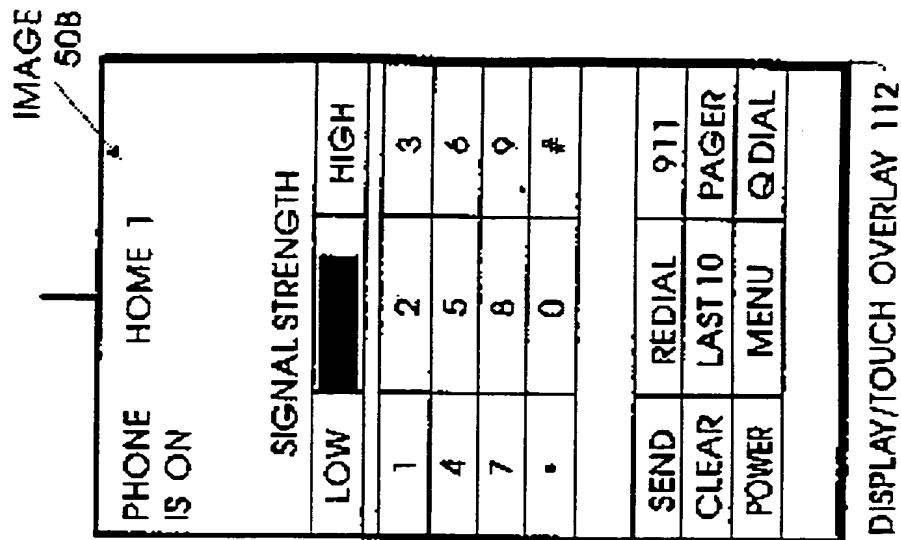


FIG. 5C

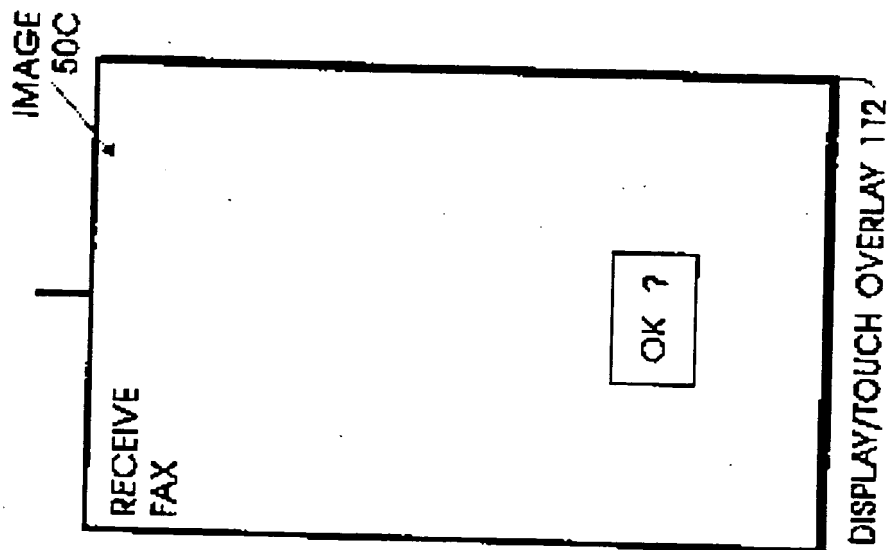


FIG. 5D

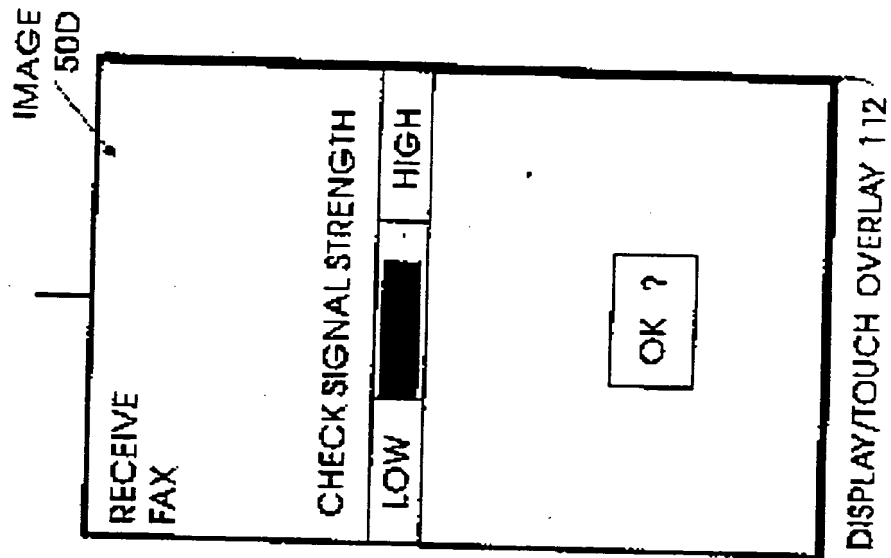


FIG. 5E

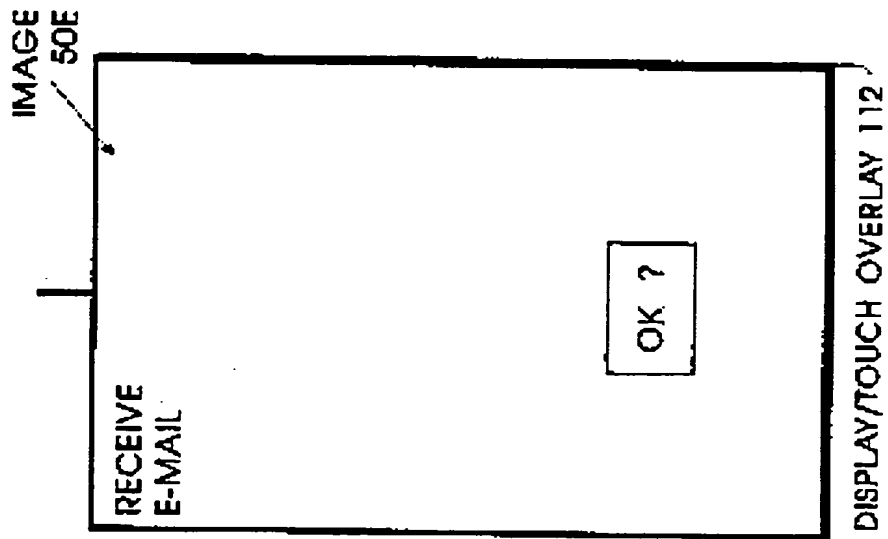
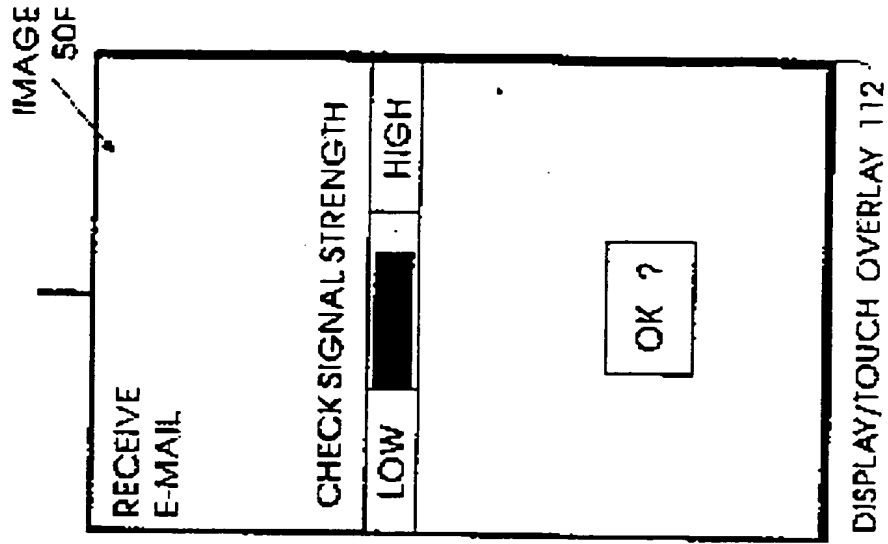


FIG. 5F




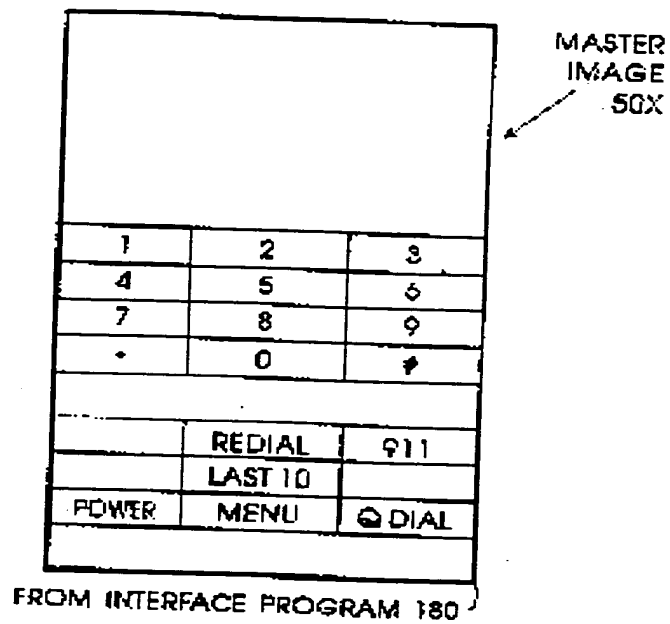


FIG. 6


PSTN
CUSTOMIZING
IMAGE 50Y

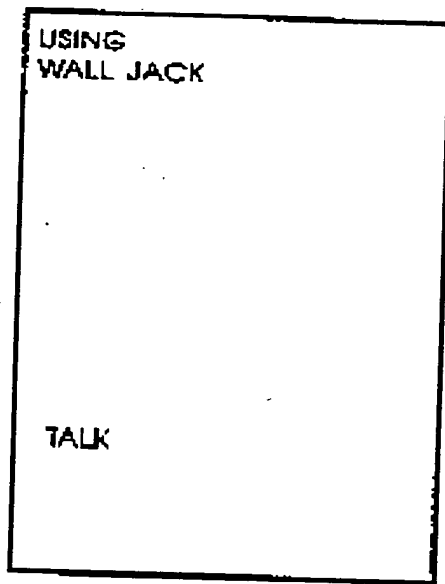

FROM PSTN SCREEN FILE 182

FIG. 6A

CELLULAR
CUSTOMIZING
IMAGE 50Z

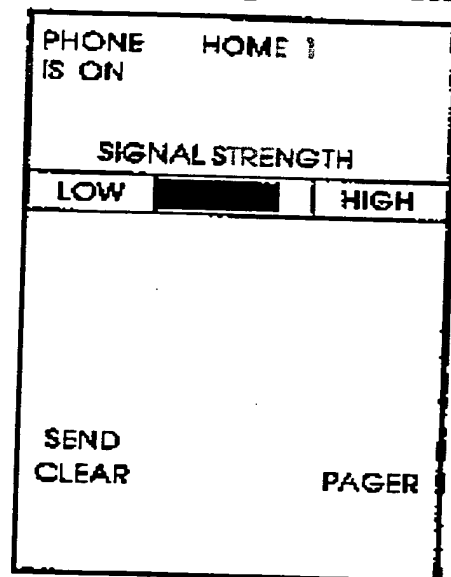

FROM CELLULAR SCREEN FILE 184

FIG. 6B

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 695 072 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
03.11.1999 Bulletin 1999/44

(51) Int Cl.⁶: H04M 1/00, H04Q 7/32

(43) Date of publication A2:
31.01.1996 Bulletin 1996/05

(21) Application number: 95305183.6

(22) Date of filing: 25.07.1995

(84) Designated Contracting States:
AT BE CH DE ES FR GB IT LI NL SE

(30) Priority: 25.07.1994 US 279413

(71) Applicant: International Business Machines Corporation
Armonk, N.Y. 10504 (US)

(72) Inventors:
• Goodwin, Julie Francis
Boca Raton, Florida 33486 (US)
• Johnson, Debra Ann Gawne
Fort Lauderdale, Florida 33308 (US)


• Lewis, James Robert
Coconut Street, Florida 33073 (US)
• Rasmussen, David James
Boca Raton, Florida 33487 (US)
• Tiller, Byron Kevin
Boca Raton, Florida 33434 (US)
• Yee, Raymond Lee
Coral Springs, Florida 33076 (US)

(74) Representative: Burt, Roger James, Dr.
IBM United Kingdom Limited
Intellectual Property Department
Hursley Park
Winchester Hampshire SO21 2JN (GB)

(54) Method and apparatus for consistent user interface in a multiple application personal communications device

(57) An option attach connector has a first indicator bit combination that alerts the device that a public switched telephone network connection has been made to it. The presence of the first indicator bit combination is a signal to the device that telephone, FAX, and E-mail communications applications are to be conducted over a PSTN link. The presence of the first indicator bit combination invokes the stored computer program to display images of menus, keypads, and visual presentations on the LCD display that are consistent with a basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the PSTN mode of communications. The presence of a second indicator bit combination different from the first indicator bit combination invokes the stored computer program to display corresponding images of menus, keypads, and visual presentations on the LCD display that are consistent with the basic display layout for both cellular telephone network and PSTN modes, but that include customized presentation features that are unique to the cellular telephone network mode of communications.

FIG. 1A

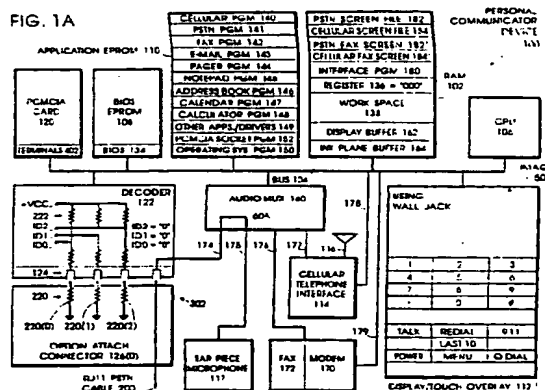



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 5183

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCLIG)
A	EP 0 552 873 A (IBM) 28 July 1993 (1993-07-28) * abstract; figure 2 * * column 2, line 23-42 * * column 3, line 44-53 * ---	1,4,5,9	H04M1/00 H04Q7/32
A	US 5 331 136 A (KRUNNFUSZ JEFFREY S ET AL) 19 July 1994 (1994-07-19) * column 1, line 53 - column 2, line 7; figure 1 * * column 7, line 10-26; figure 7 * ---	1,4,5,9	
A	US 5 139 439 A (SHIE ALEN) 18 August 1992 (1992-08-18) * column 1, line 46 - column 2, line 2; figure 4 * * column 2, line 67 - column 3, line 2 * ---	1,5,9	
A	WO 91 04461 A (INTELLIGENCE TECHNOLOGY CORP) 4 April 1991 (1991-04-04) * page 2, line 4-18; figures 1,3 * -----	1,5,9	
			TECHNICAL FIELDS SEARCHED (InCLIG)
			H04M G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 September 1999	Examiner de Biolley, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

FPO FORM 1503 (03/82) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 95 30 5183

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-09-1999

Patent document cited in search report		Publication date		Patent: family member(s)		Publication date
EP 0552873	A	28-07-1993	JP	5265927 A		15-10-1993
			JP	8021015 B		04-03-1996
			BR	9300032 A		27-07-1993
			CA	2082118 A,C		21-07-1993
			CN	1074767 A,B		28-07-1993
			KR	9603066 B		04-03-1996
			US	5386567 A		31-01-1995

US 5331136	A	19-07-1994	US	5052020 A		24-09-1991
			US	5218187 A		08-06-1993
			US	5680633 A		21-10-1997
			US	5567925 A		22-10-1996
			CA	2074169 A		19-07-1991
			EP	0511295 A		04-11-1992
			WO	9111065 A		25-07-1991
			US	5555276 A		10-09-1996
			US	5657317 A		12-08-1997
			US	5679943 A		21-10-1997
			US	5790536 A		04-08-1998
			US	5726984 A		10-03-1993
			US	5912926 A		15-06-1999
			US	5365546 A		15-11-1994
			US	5313053 A		17-05-1994
			AU	678135 B		22-05-1997
			AU	1455792 A		15-09-1992
			CA	2104788 A		26-08-1992
			EP	0573567 A		15-12-1993
			WO	9215073 A		03-09-1992
			US	5872354 A		16-02-1999
			US	5834753 A		10-11-1998
			US	5305181 A		19-04-1994
			US	5914481 A		22-06-1999
			US	5349497 A		20-09-1994

US 5139439	A	18-08-1992	NONE			

WO 9104461	A	04-04-1991	EP	0444052 A		04-09-1991
			JP	4503436 T		18-06-1992

EPO FORM P358

For more details about this annex: see Official Journal of the European Patent Office, No. 12/82

IS PAGE BLANK (USPTO)